
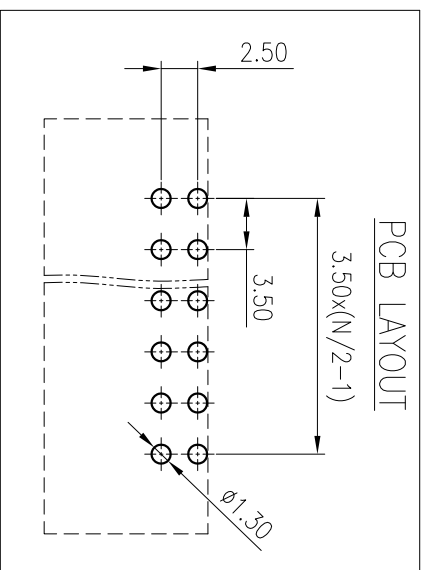

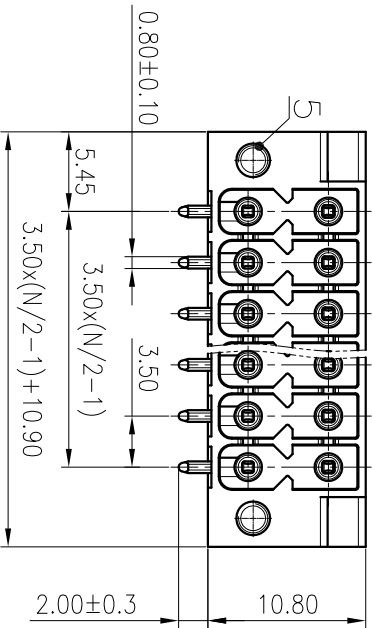
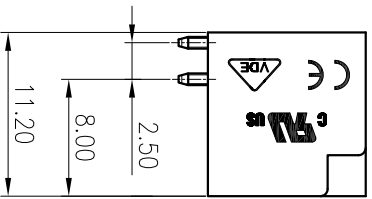


公差表/General Tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50			

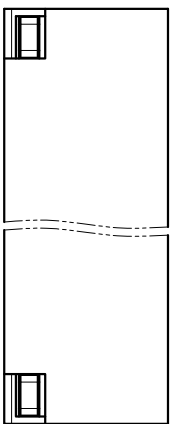

ITEM	NAME OF PART	MATERIAL	NOTES
5	Nut	Steel	M2/Zn Plated
4	Long Pin	Copper	Sn Plated
3	Short Pin	Copper	Sn Plated
2	Patch	LCP	UL94V-0
1	Housing	LCP	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	150/8	50/8	/
EC 标准/EC Standard:	/		
过压类别/Overvoltage Category/污染等	/		
级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	200/9.5	250/9.5	320/9.5
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5	2.5	2.5
间距/Pitch(mm)/线数范围/Poles	3.5/N=04~48P		
使用温度范围/Operating temperature(°C)	-40~+130		
符合RoHS环保要求/Conform to RoHS	Yes		

SURFACE: /

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD:	/
CHKD:	/
NAME:	DEGSON ® 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD

DRAFT:	CenMZ	2020.06.16	DRAWING NO.:	15EDGRHCM-THR-3.5-C01	REV	T0
TYPE:	CUSTOMER	DRAWING	SCALE:	2:1	SHEET	1/1

REV	ECN	DESCRIPTION	DRAFT	DATE