

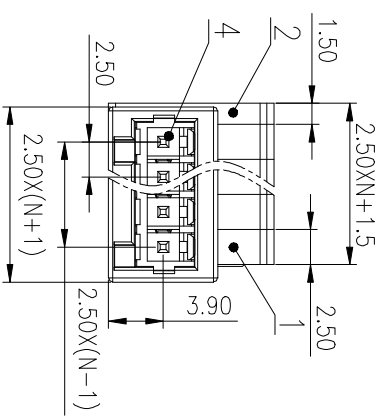
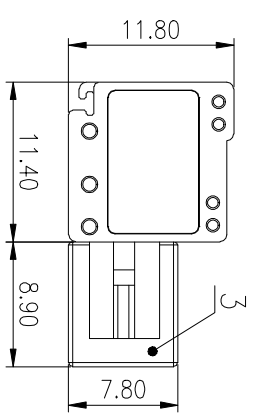




PITCH RANGE		NOMINAL DIMENSION RANGE			
IN MM		IN MM			
OVER	OVER	OVER	OVER	OVER	OVER
TO	TO	TO	TO	TO	TO
6	10	24	30	60	100
±0.10	±0.15	±0.25	±0.20	±0.50	±0.70
±0.10	±0.15	±0.25	±0.30	±0.50	±0.70



5	Spring	Stainless Steel
4	Pin	Copper
3	Housing-2	PA66
2	Cover	PA66
1	Housing-1	PA66

UL 标准 / UL Standard:	B	C	D
额定电压 / Rated Voltage (V) / Current (A)	150/4	/	/
IEC 标准 / IEC Standard:	/	/	/
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III/3	III/2	II/2
额定电压 / 电涌 / Rated Voltage (V) / Current (A)	130/6	/	/
额定脉冲电压 / Rate Impulse Voltage (kV)	2.5	/	/
额定范围 (硬线和软线) / Wire Range (rigid and flexible) (mm <sup>2</sup> / AWG)	0.2~0.5 / 28~20		
剥线长度 / Stripping length (mm)	2.5 / N=02~12P		
使用温度范围 / Operating temperature (°C)	-40~+105		
符合RoHS环保要求 / Conform to RoHS	Yes		
标准颜色 / Standard color	PANTONE 7534U		



MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD:	
NAME:	8EDGKR-2.5-XXP-11-01A(H)
DRAWING NO.:	8EDGKR-2.5-C01
TYPE:	CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	SCALE: 2:1	REV	TO

D

C

B

A

D

C

B

A

1

2

3

4

5

6

1