


精度等级/General	tolerance/(mm)
0	>3
~	>6
3	~
6	10
10	18
±0.12	±0.18
±0.22	±0.26
±0.31	±0.31
±0.37	±0.57
±0.80	±0.93
±1.05	±1.15
±1.60	±2.20
±2.50	±2.50
0.1/1.0	~
±Z	~

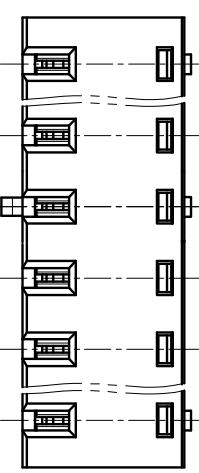

5	Screw	Steel	M3/7n Plated
4	Clamp	Copper alloy	Sn Plated
3	Cage	Copper alloy	M3/Ni Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/18	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	250/15	320/15	630/15
额定冲击电压(kV)/Rate Impulse Voltage(kV)	4.0		
额定扭矩/扭矩 Tightening(N·m/Lb·in)	M3: 0.6/5.3		
线芯范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~2.5/30~12		
间距/Pitch(mm)/线数范围/Poles	5.08/N=02~24P		
剥线长度/Stripping length(mm)	7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS标准/Conform to RoHS	Yes		

MATERIAL:

SURFACE:

NINGBO DEGSON ELECTRICAL CO., LTD

NINGBO DEGSON ELECTRICAL CO., LTD

STATUS: /

NAME: ZEDGKJ-5.08-XXP-1Y-00A(H)

Appd: Lon ChH 2020.06.24

DRAWING NO.: ZEDGKJ-5.08-C01

CHKD: Yu JZh 2020.06.24

REV: T1

DRAFT: Dong 2016.10.20

SCALE: 2:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				
4				