

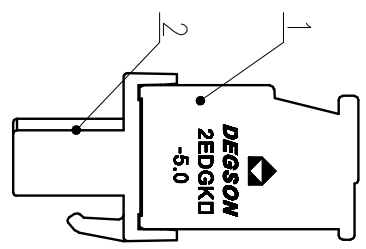
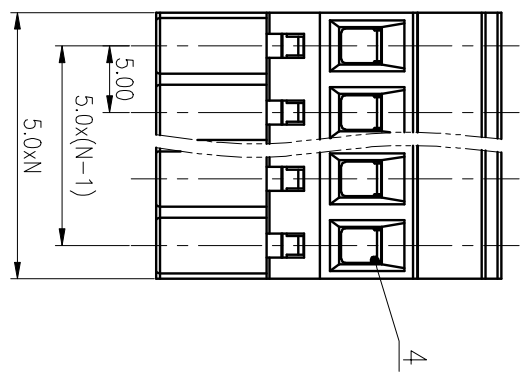
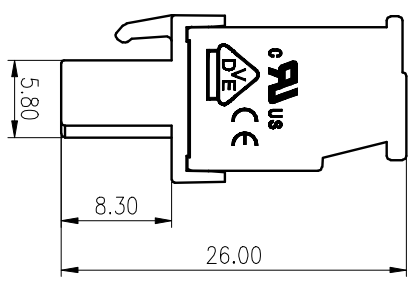


公差/General Tolerances(mm)		公差/General Tolerances(mm)										公差/General Tolerances(mm)	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
													±2

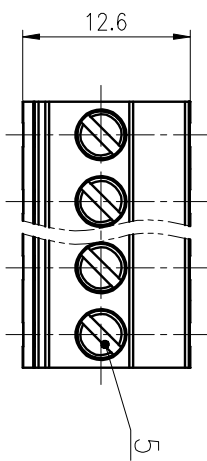

O2P: Clasp on the left from this view

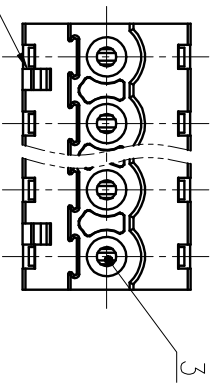

5	Screw	Steel	M3/Zn Plated
4	Cage	Copper alloy	M3/Ni Plated
3	Clamp	Copper alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	/	320/18	/
额定脉冲电压(KV)/Rote Impulse Voltage(KV)	/	4	/
额定扭矩/Torque Tightening(N·m/Lbin)	M3, 0.59/5.21		
导线范围(导线规格)/Wire Range(rigid and flexible)(mm² AWG)	1.0~2.5/28~12		
间距/Pitch(mm)/间距(Poles)	5.00/N=02~24P		
剥线长度/Stripping length(mm)	7		
工作温度范围/Operating temperature(°C)	-40~+105		
符合RoHS/Conform to RoHS	Yes		

MATERIAL:	/
MAT NO.:	/
STATUS:	/
NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	Lon CHH 2020.05.26
CHKD:	Gong YZh 2020.05.26
DRAFT:	CCM 2017.12.07
DRAWING NO.:	2EDGKB-5.0-C10
TYPE:	CUSTOMER DRAWING
SCALE:	2:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE	SCALE	SHEET
					A4	2:1	1/1

A B C D

1 2 3 4 5 6