
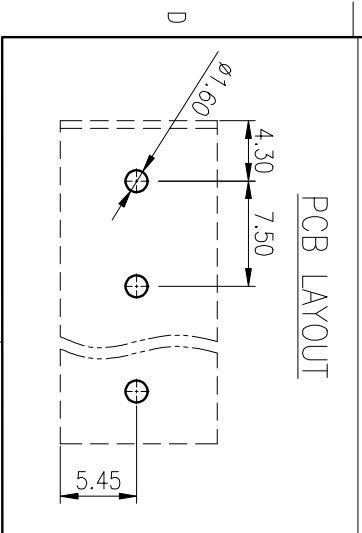
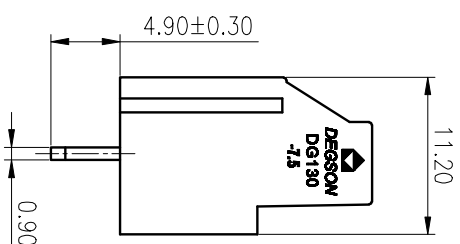
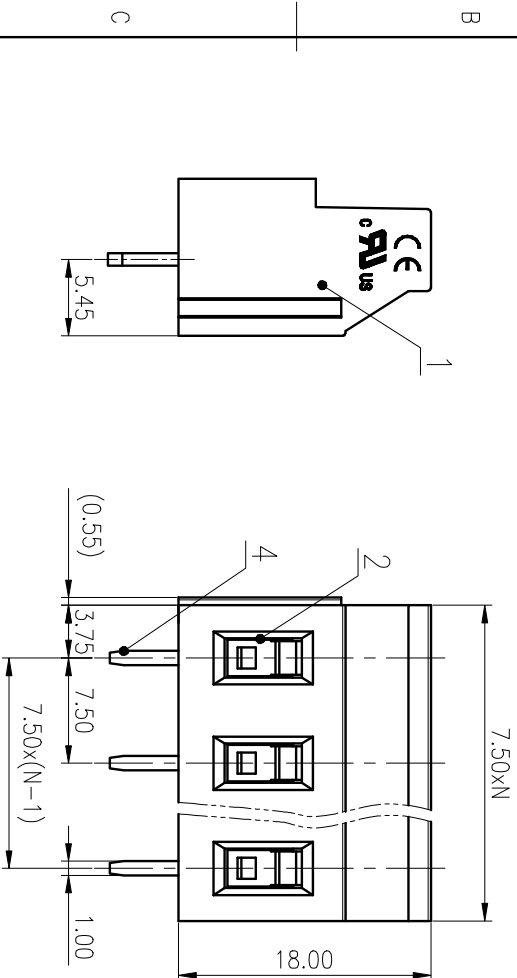


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

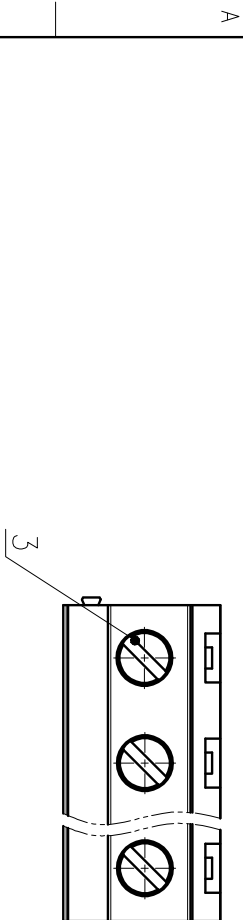

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET
1								1/1

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	NAME: DG130-7.5-XXP-1Y-00A(H)	
APPD: LANCH 2020.03.18		DRAWING NO.: DG130-7.5-C01	
CHKD: YUJZ 2020.03.18		TYPE: CUSTOMER DRAWING	
DRAFT: PengWU 2010.07.07		SCALE: 2:1	

ITEM	NAME OF PART	MATERIAL	NOTES
4	Pin Header	Copper Alloy	Sn Plated
3	Screw	Steel	M3/Zn Plated
2	Cage	Copper Alloy	M3/Ni Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/20	/	300/10
IEC 标准/IEC Standard:	III/2		
过压类别/Overvoltage Category/污染等级	III/2		
额定电压/电压/Rated Voltage(V)/Current(A)	450/20		
工频耐压/Withstanding Voltage(kV/min)	2.5		
拧紧扭矩/Torque Tightening(N·m/Lb·in)	M3: 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.5~2.5/26~12		
间距/Pitch(mm)/线数范围/Poles	7.5/N=02~24P		
引线长度/Stripping length(mm)	8~9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		