

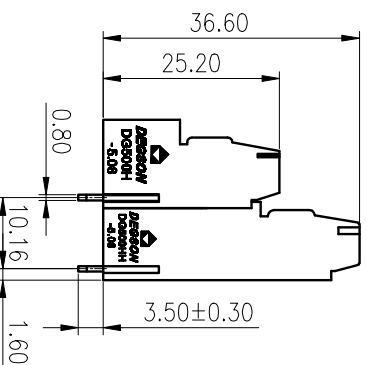


5.08XN/2+2.54

5.08XN/2

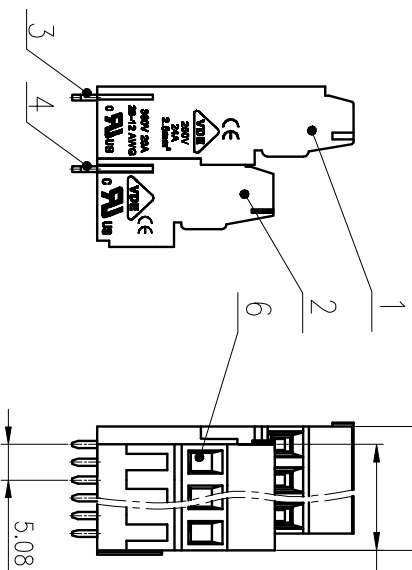

公差等级/General	tolerance(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50			

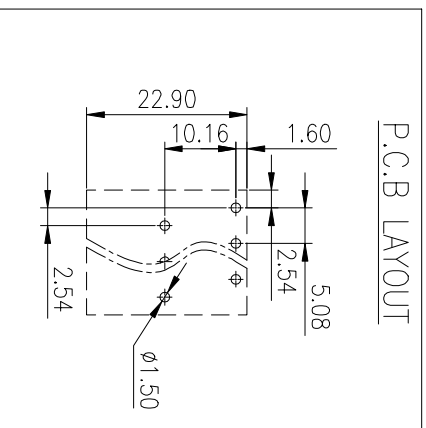

P.C.B LAYOUT

6	Cage	Copper Alloy	M2.5/Ni plated
5	Screw	Steel	M2.5/In plated
4	Pin header2	Copper Alloy	Sn plated
3	Pin header1	Copper Alloy	Sn plated
2	Housing2	PA66	UL94V-0
1	Housing1	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准 /UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/20	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/特类等	/	III/2	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	250/18	/
工额耐压/Withstanding Voltage (V/min)	/	AC2000	/
绕线扭矩/Torque Tightening(N·m/Lb.in)	M2.5, 0.4/3.54		
绕线范围(绕线强度和线)/Wire Range(rigid and flexible)(mm ² /AWG)	1.0~2.5/28~12		
侧面/Pitch(mm)/绕线范围/Poles	5.08/N=04~xxP		
剥线长度/Stripping length(mm)	6~7		
使用温度范围/Operating Temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:			
PANTONE / RAL	/		

MATERIAL: SURFACE:

MAT NO.: /

STATUS: /

APPD: LI GL 2020.06.16

CHKD: Mgo J 2020.06.16

DRT: Feng X 2020.06.07

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
宁波高松电子有限公司

NAME: **DG500AA-5.08-XXP-1Y-00A(H)**

DRAWING NO.: DG500AA-5.08-C01

TYPE: CUSTOMER DRAWING

REV ECN DESCRIPTION

DRT DATE

SIZE: A4

SCALE: 1:1

SHEET 1/1