
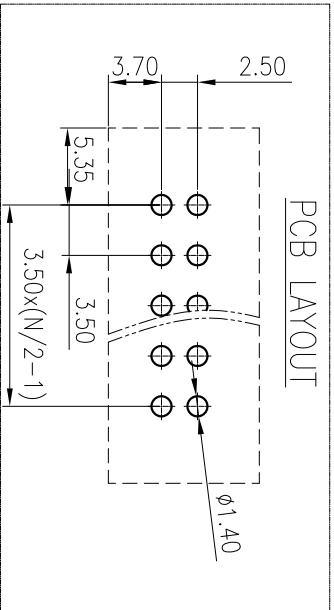

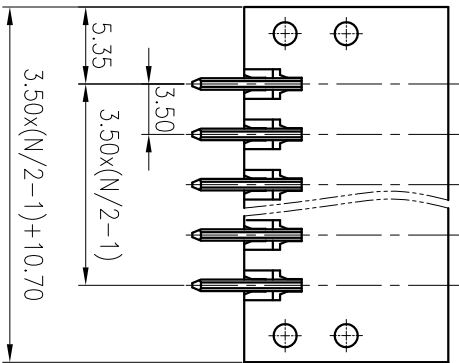
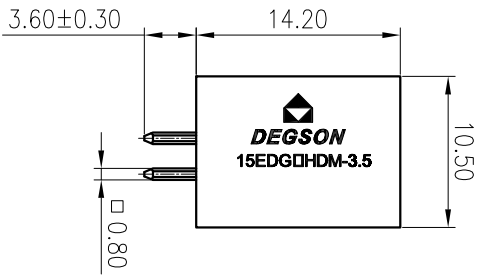


标注公差/General Tolerances(mm)		公差带/General Tolerances(mm)	
0	>3	>6	>180
~	~	~	~
3	6	10	18
±0.12	±0.18	±0.22	±0.31
±0.26	±0.31	±0.37	±0.57
±0.80	±0.93	±1.05	±1.15
±1.60	±2.20	±2.50	±2.50
±2	±2	±2	±2

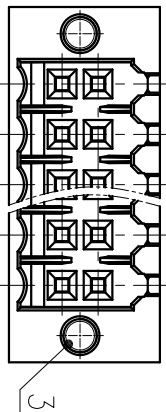

3	Nut	Steel	M3/Zn Plated
2	Pin	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	150/10	50/10	/
EC 标准/EC Standard:	/		
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	80/10	125/10	250/10
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5	2.5	2.5
拧紧扭矩/Torque Tightening(N·m/Lb·in)	0.2/1.77		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	/		
间距/Pitch(mm)/线数范围/Poles	3.50/N=04~48P		
剥线长度/Stripping length(mm)	/		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	/		
PANTONE / RAL	/		
MATERIAL:	/		
SURFACE:	/		

**DEGSON** 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: 15EDGVHDM-3.5-XXP-14-00A(H)

APPD: LIGL 2020.06.22

CHKD: MaoJ 2020.06.22

DRAFT: WangY2 2020.06.22

DRAWING NO.: 15EDGVHDM-3.5-C01



SIZE: A4

SCALE: 2:1

TYPE: CUSTOMER DRAWING

SHEET 1/1

REV

ECN

DESCRIPTION

DRAFT

DATE



SIZE: A4

SCALE: 2:1

TYPE: CUSTOMER DRAWING

SHEET 1/1