
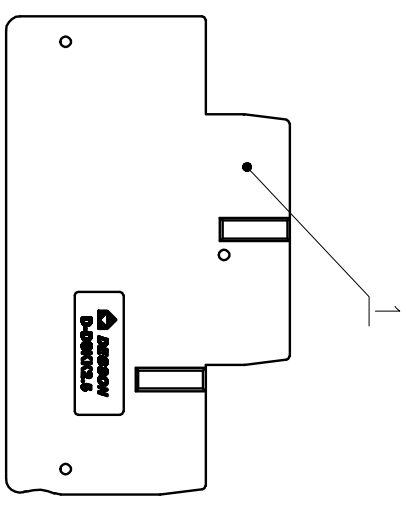

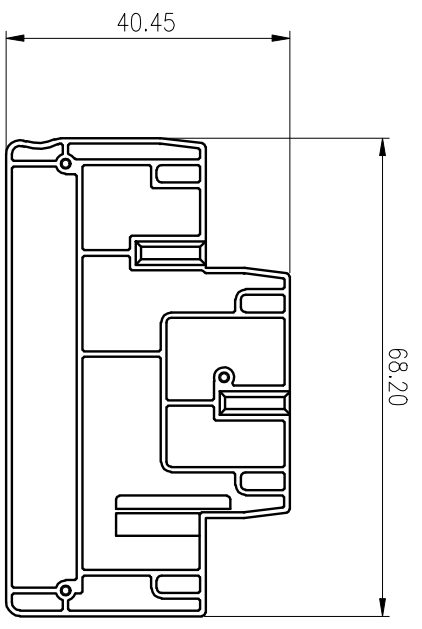


公差带/General Tolerances(mm)		公差带/General Tolerances(mm)										公差带/General Tolerances(mm)	
0	>3	>5	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±Z

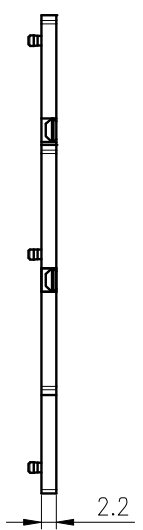

ITEM	NAME OF PART	MATERIAL	NOTES
1	Cover	PA66	UL94V-0
使用温度范围/Operating temperature(°C) -40~+105			
符合RoHS环保要求/Conform to RoHS Yes			
标准颜色编号/Standard color number: PANTONE / RAL /			

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: Li GL 2020.06.01 NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD** 宁波高松电子有限公司

CHKD: Moo J 2020.06.01

DRAWING NO.: D-DSKK2.5-C01

DRAFT: Wong LX 2020.06.01 TYPE: CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	SCALE: 1:1	REV	SHEET
1							TO-1	1/1