
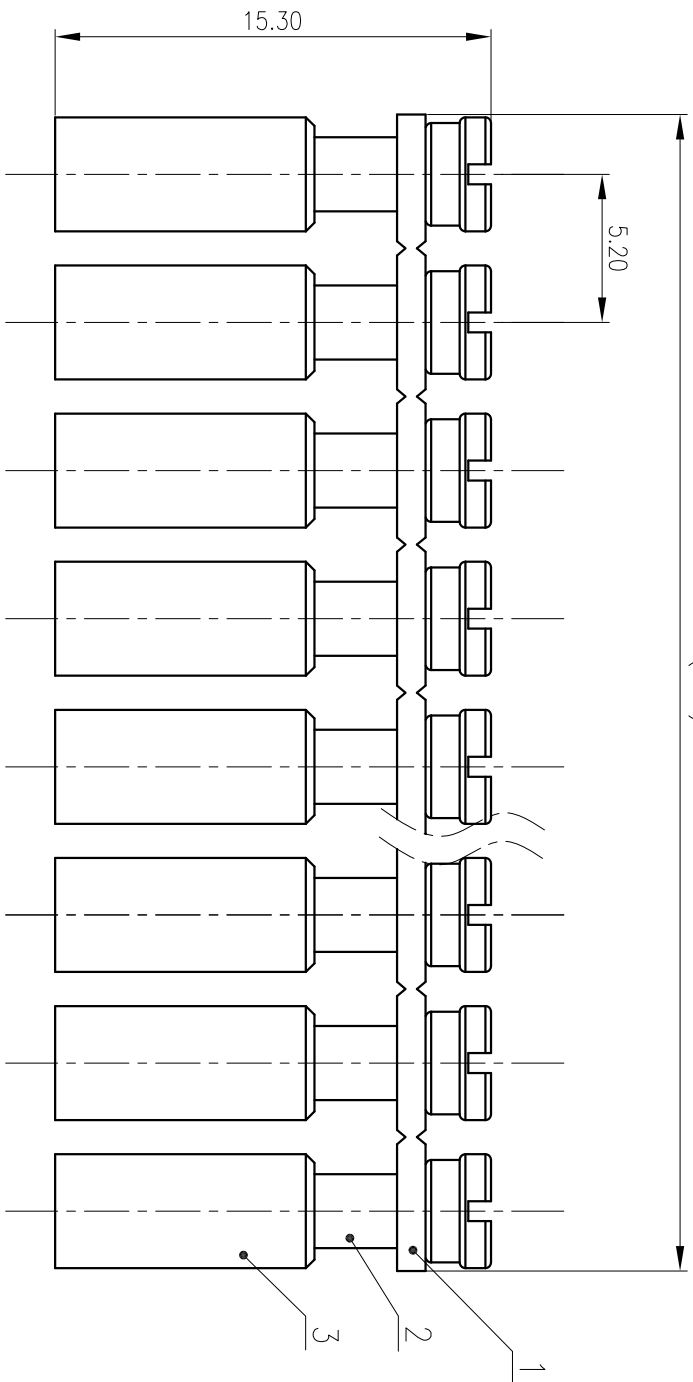


标注公差/General tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
F0.12	F0.18	F0.22	F0.26	F0.31	F0.37	F0.57	F0.80	F0.93	F1.09	F1.15	F1.60	F2.20	F2.50	F3.00	1/10
															±Z

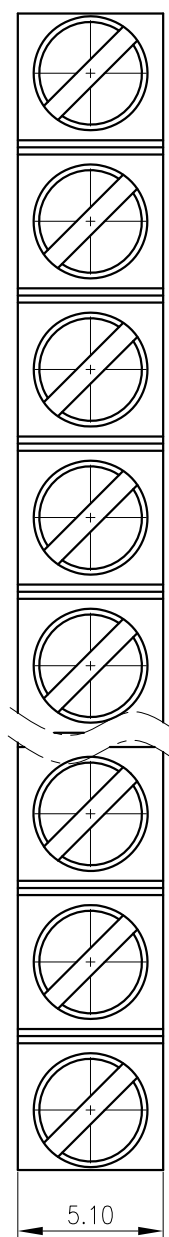

ITEM	NAME OF PART	MATERIAL	NOTES
3	Pillar	Copper Alloy	M3/Ni Plated
2	Screws	Copper Alloy	M3/Ni Plated
1	Current carrier	Copper	Sn Plated

UL 标准/UL Standard: B C D

螺丝扭矩/Torque Tightening(N·m/Lb·in) M3, 0.5/4.43

间距/Pitch(mm)/线数范围/Poles 5.20/N=02~10P

使用温度范围/Operating temperature(°C) -40~+105

符合RoHS环保要求/Conform to RoHS Yes

MATERIAL: SURFACE:

MAT NO.: /

STATUS: /

APPD: Lj GL 2020.06.06

CHKD: Mdo J 2020.06.06

DRAFT: Feng X 2020.05.22

DEGSON 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

FBRI XX-5

DRAWING NO.: FBRI 10-5-C01

TYPE: CUSTOMER DRAWING

SCALE: 4:1

SHEET 1/1

A B C D

A B C D

1 2 3 4 5 6

REV	ECN	DESCRIPTION	DRAFT	DATE
1				