

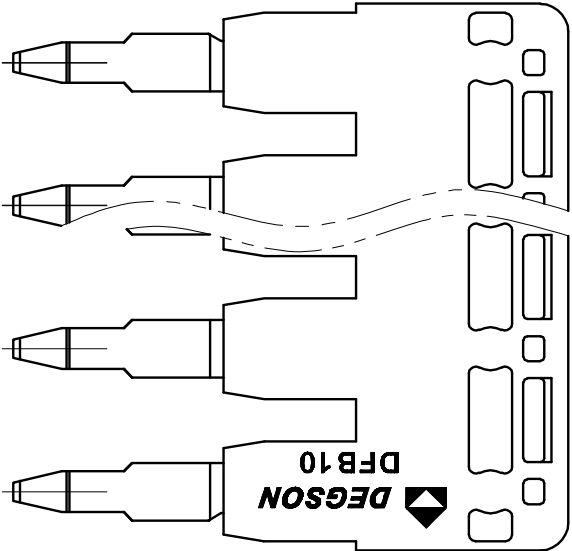


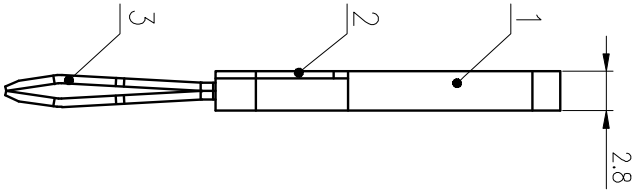

$10.2 \times (N-1) + 8.4$

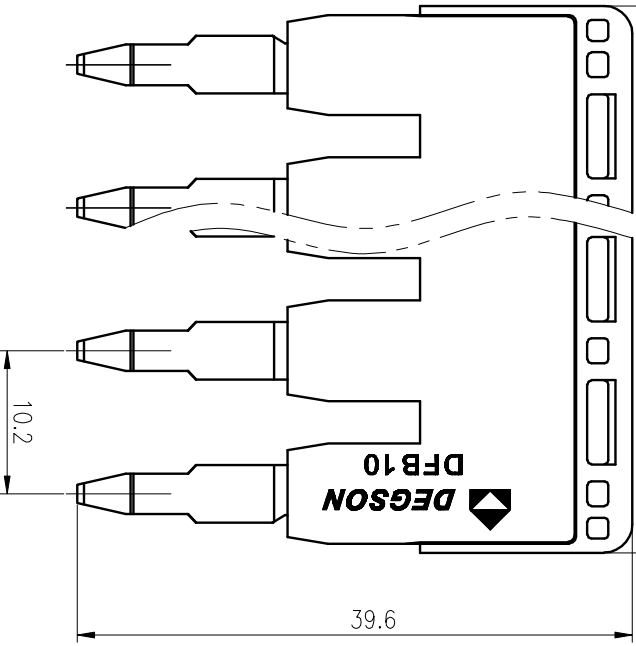

公差等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±Z	
问题/Pitch(mm)	线数/lines	使用温度范围/Operating temperature(°C)														
符合RoHS环保要求/Conform to RoHS	Yes	10.2/N=02~10P														
		-40~+105														

ITEM	NAME OF PART	MATERIAL	NOTES
3	Bridgeware	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: LI GL 2020.06.04

CHKD: Mao J 2020.06.04

DRAFT:ZhengQG 2020.06.04

DEGSON 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO.,LTD

NAME: DFB10-XXP-1Y-00A(H)

DRAWING NO.: DFB10-C01

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1	REV	T0