

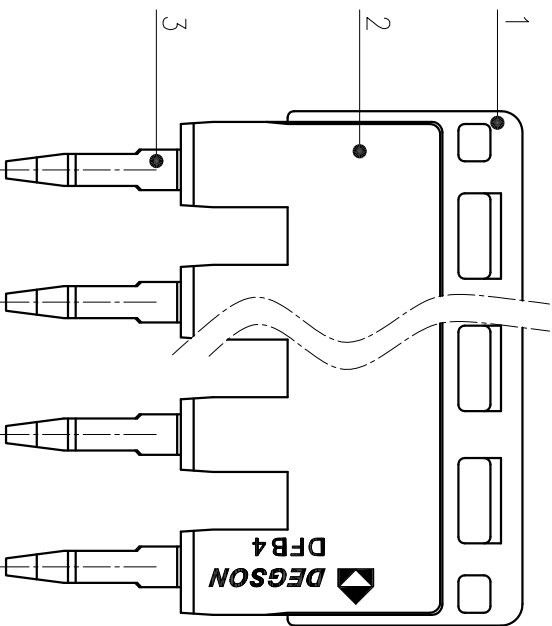


公差/General Tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	>630	>800	>1000
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.43	±0.51	±0.60	±0.70	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±3.15	±4.00
0.1/1.0																		
±Z																		



6.2x(N-1)+5.5

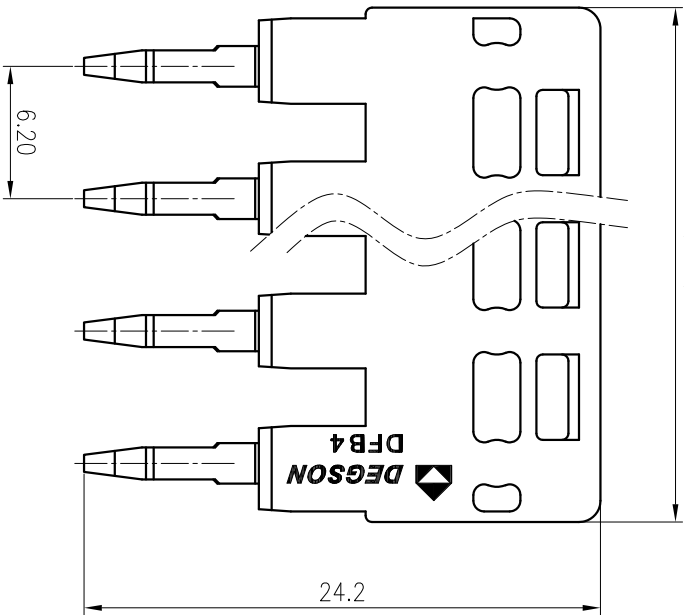

ITEM	NAME OF PART	MATERIAL	NOTES
3	Current	Copper	Sn plated
2	Cover	PA66	UL94 V-0
1	Housing	PA66	UL94 V-0

REV	ECN	DESCRIPTION	DRFT	DATE

MATERIAL: /	SURFACE: /
MAT NO.: /	
STATUS: /	
APPD: LI GL 2020.05.22	NAME: DEGSON 宁波高松电子有限公司
CHKD: Mao J 2020.05.22	NINGBO DEGSON ELECTRICAL CO., LTD
DRFT: Chen K 2020.05.22	DRAWING NO.: DFB4-C01
	TYPE: CUSTOMER DRAWING
	SCALE: 3:1
	REV: D0-1
	SHEET: 1/1

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污染等	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	/	/
间距/Pitch(mm)/线数范围/Poles	6.2/N=02~10P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		