
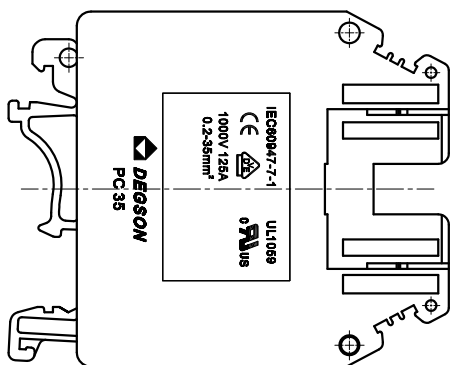
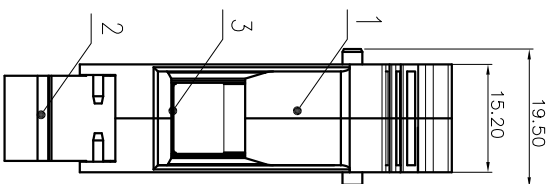
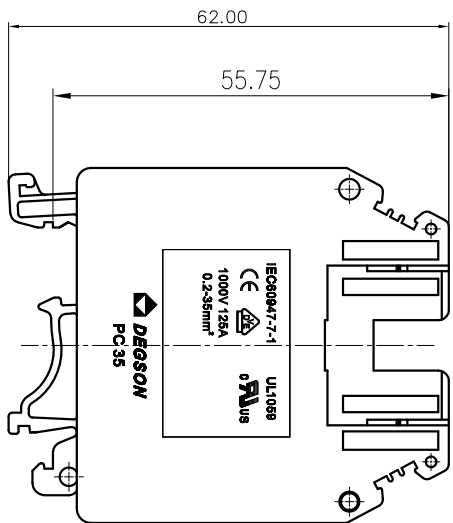


标注公差/General tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1.0
~	~	3	6	10	18	30	50	80	120	180	250	315	400	500	>500	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2	~

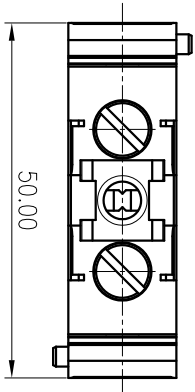

3	Hardware group															
2	Housing 2	PA66														
1	Housing 1	PA66	UL94V-0													
ITEM	NAME OF PART	MATERIAL	NOTES													

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		600/150	600/150	600/150
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)		1000/125	/	/
额定冲击电压(KV)/Rate Impulse Voltage(KV)		8.0	/	/
拧紧扭矩/Torque Tightening(N·m/Lbin)		M6: 2.5/22.15		
导线范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)		0.2~35/18~1/0		
间距/Pitch(mm)		15.20		
剥线长度/Stripping length(mm)		15~16		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

MATERIAL: SURFACE:

MAT NO.: /
 STATUS: /
 APPD: Li GL 2020.06.04
 CHKD: Moo J 2020.06.04
 DRFT: WL 2017.5.26
 NAME: **DEGSON** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

PC35-01P-1Y-00A(H)

DRAWING NO.: PC35-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 REV T2
 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
1				

SIZE: A4
 mm
 inch

A
B
C
D

1 2 3 4 5 6