
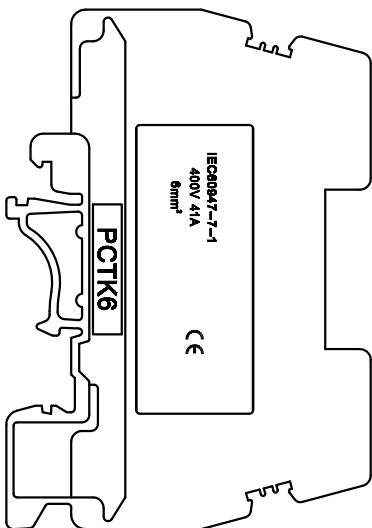

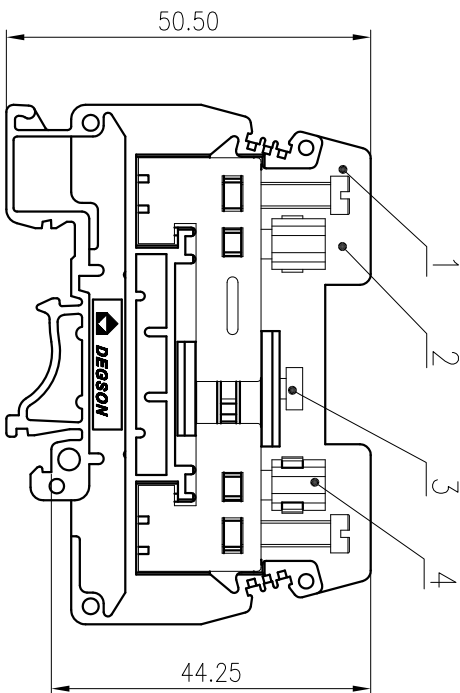


尺寸公差/General tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±	±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2

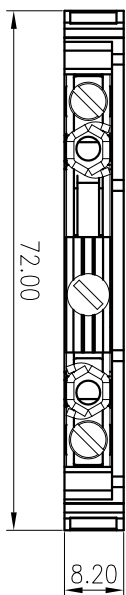

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/40	/	/
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	400/41	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6:0	/	/
螺丝扭矩/Torque Tightening(N·m/Lb·in)	M4, 1.2/10.53		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AMG)	0.5~6/26~10		
可距/Pitch(mm)	8.20		
剥线长度/Stripping length(mm)	13-14		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	/		
PANTONE / RAL	/		

MATERIAL: SURFACE:

MAT NO.: /
 STATUS: /
 APPD: Li QL 2020.06.04
 CHKD: Mdo J 2020.06.04
 DRFT: Apple 2008.02.27
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET 1/1

DEGSON® 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

PCTK6-01P-1Y-00A(H)

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Left Hardware	Copper Alloy	Ni Plated
3	Contact Hardware	Copper Alloy	Ni Plated
4	Right Hardware	Copper Alloy	Ni Plated

REV	ECN	DESCRIPTION	DRFT	DATE

SIZE	SCALE	SHEET
A4 (inch)	1:1	1/1