
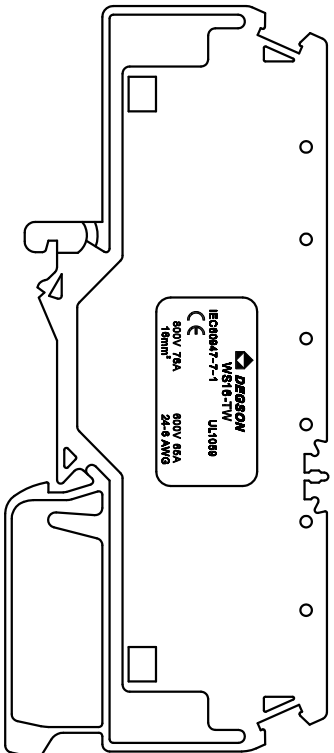
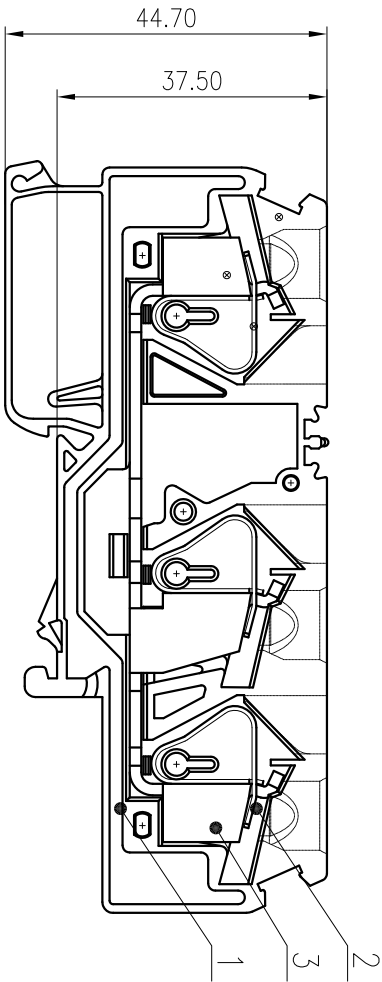


公差/General Tolerances(mm)		公差/General Tolerances(mm)										公差/General Tolerances(mm)	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	D 0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	
3	6	10	18	30	50	80	120	180	250	315	400	500	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	

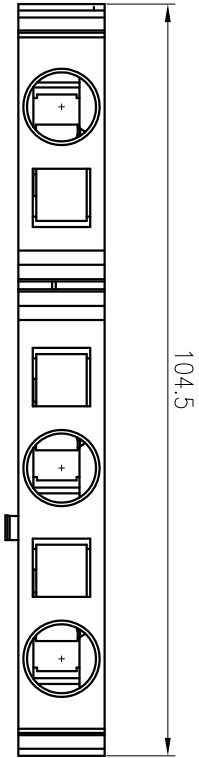

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	600/65	/	/
EC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污染等级/ Pollution Degree	III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	800/76	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
导线范围(硬导线/软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~1.6/24~6	/	/
间距/Pitch(mm)	12.0	/	/
剥线长度/Stripping length(mm)	16-17	/	/
使用温度范围/Operating temperature(°C)	-40~+105	/	/
符合RoHS环保要求/Conform to RoHS	Yes	/	/
标准颜色编号/Standard color number:	/	/	/
PANTONE / RAL	/	/	/

MATERIAL: / SURFACE: /

MAT NO.: / NINGBO DEGSON ELECTRICAL CO., LTD

STATUS: /

APPD: Li GL 2020.06.05 NAME: WS16-TW-01P-1Y-00A(H)

CHKD: Mao J 2020.06.05 DRAWING NO.: WS16-TW-C01

DRT: Wang Y 2020.06.05 TYPE: CUSTOMER DRAWING SCALE: 1:1

ITEM	NAME OF PART	MATERIAL	NOTES	REV	ECN	DESCRIPTION	DRT	DATE
3	Current Carrier	Copper	Sn Plate					
2	Spring	Stainless Steel						
1	Housing	PA66	UL94V-0					
1								

SIZE	SCALE	SHEET
A4	1:1	1/1