


精度等级/General Tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/行架等级/ Pollution Degree	III/3	/	/
额定电压/电压/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(V)/Rate Impulse Voltage(KV)	8.0	/	/
额定扭矩/Torque Tightening(N·m/Lb.in)	/	/	/
线径范围(裸线和镀层)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~2.5/28~12	/	/
间距/Pitch(mm)/线架范围/Poles	5.0/N=01P	/	/
剥线长度/Stripping length(mm)	9	/	/
使用温度范围/Operating Temperature(°C)	-40~+105	/	/
符合RoHS环保要求/Conform to RoHS	Yes	/	/
标准颜色编号/Standard color number:	/	/	/
PANTONE / RAL	/	/	/

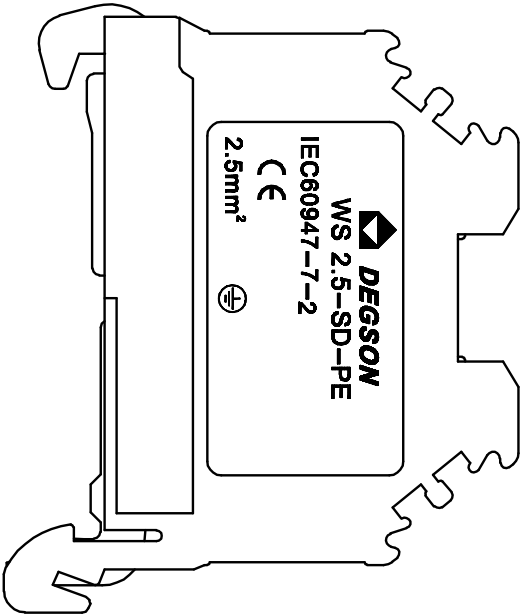

ITEM	NAME OF PART	MATERIAL	NOTES
4	Current carrier	Copper alloy	Sn Plated
3	Current carrier	Copper	Sn Plated
2	Spring	Stainless steel	/
1	Housing	PA66	UL94V-0

MATERIAL: /
 MAT NO.: /
 STATUS: /
 APPD: LIGL 2020.05.28
 CHKD: Mood 2020.05.28
 DRT:ZhengQG 2020.05.28
 NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO.,LTD**
WS2.5-SD-PE-01P-1C-00A(H)

REV	ECN	DESCRIPTION	DRT	DATE

SIZE: A4
 TYPE: CUSTOMER DRAWING
 SCALE: 2:1
 SHEET 1/1