
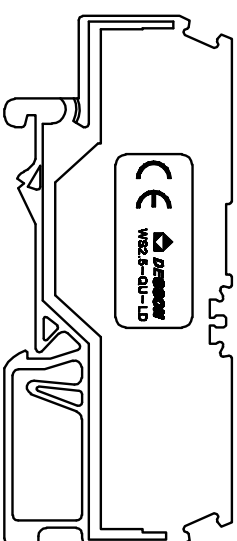



公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>5	>10
~	~	~	~
3	6	10	18
~	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±4.00	±5.00	±7.50
0.1/1.0	0.1/1.0	0.1/1.0	0.1/1.0
±Z	±Z	±Z	±Z

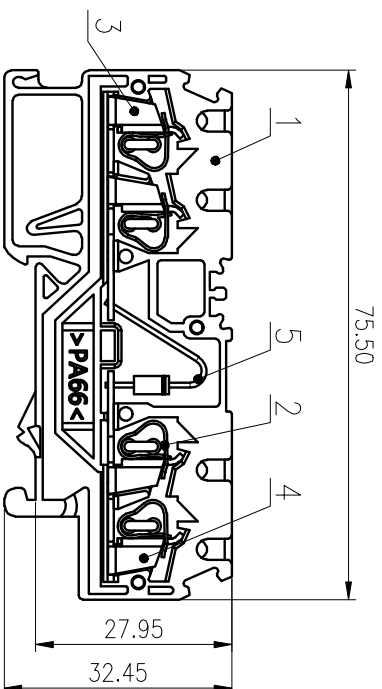

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Spring	Steel	
3	Current carrier 1	Copper	Sn plated
4	Current carrier 2	Copper	Sn plated
5	Diode	/	1N4007

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污染等	III/2	/	/
绝缘/Pollution Degree	/	/	/
额定电压/电涌/Rated Voltage(V)/Current(A)	250/0.5	/	/
最大反向电压(V)/Reverse Voltage(V)	1000	/	/
线径范围(硬线/软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	0.2~2.5/28~14	/	/
间距/Pitch(mm)	5.00	/	/
剥线长度/Stripping length(mm)	9	/	/
使用温度范围/Operating Temperature(°C)	-40~+105	/	/
符合RoHS要求/Conform to RoHS	Yes	/	/
标准颜色编号/Standard color number:	/	/	/
PANTONE / RAL	/	/	/

MATERIAL: SURFACE:

MAT NO.: /  
 STATUS: /  
 APPD: LIGL 2020.05.28  
 CHKD: MaoJ 2020.05.28  
 DRT:ZhengQG 2020.05.28

NAME: **DEGSON** 宁波高松电子有限公司  
**NINGBO DEGSON ELECTRICAL CO.,LTD**  
**WS2.5-QU-LD-01P-1Y-100A(H)**

DRAWING NO.: WS2.5-QU-LD-C01  
 TYPE: CUSTOMER DRAWING  
 SCALE: 1:1  
 REV: D0-1  
 SHEET: 1/1

REV	ECN	DESCRIPTION	DRT	DATE
1	2	3	4	5