
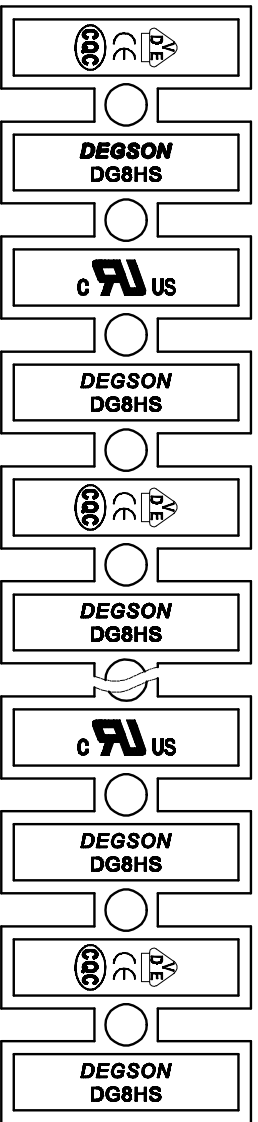


Pitch Range	Nominal Dimension Range					
	In mm		In mm		In mm	
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150	0.1/10
TO 6	TO 10	TO 30	TO 60	TO 100	TO 150	≤
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±2

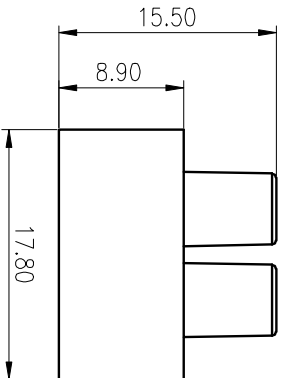

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	NAME: DG8HS-1.2-XXP-1Y-100A(H)	
APPD:	/	DRAWING NO.: DG8HS-C06	
CHKD:	/	DRAFT: ZHQ 2015.12.01	
DRT:	ZHQ 2015.12.01	TYPE: CUSTOMER DRAWING	
REV	ECN	DESCRIPTION	DRAFT
1	2	3	4
1/1	1/1	1/1	1/1

3	Current carrier	Steel	Zn Plated
2	Screws	Steel	Zn Plated
1	Housing	PA66	UL94V-2
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/20	/	300/70
EC 标准/IEC Standard:	B	C	D
过压类别/Overvoltage Category/污染等	III/3	III/2	II/2
绝缘/Insulation Degree	/	/	/
额定电压/电压/Rated Voltage(V)/Current(A)	/	450/32	/
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	/	2.5	/
拧紧扭矩/ Torque Tightening(N·m/Lbin)	/	M2.5: 0.4/3.54	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	/	0.5~4.0/20~12	/
间距/Pitch(mm)/线数范围/Poles	/	8.2	/
剥线长度/Stripping length(mm)	/	9	/
使用温度范围/Operating temperature(°C)	/	-40~+105	/
符合RoHS标准/Conform to RoHS	/	Yes	/