
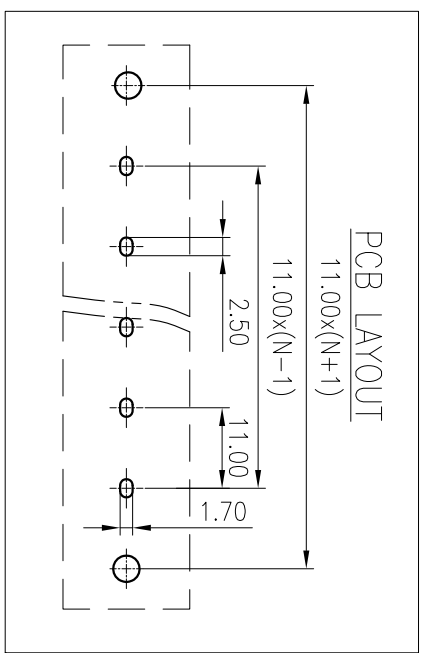


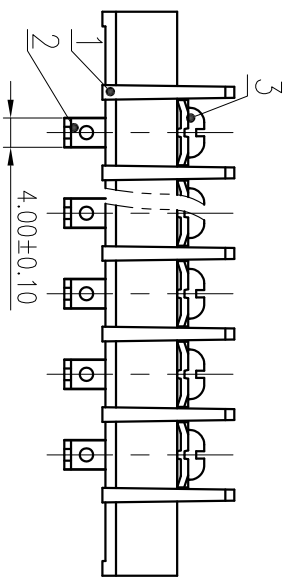


| Pitch Range In mm | Nominal Dimension Range In mm | | | | | | - 0.1/10 / |
|-------------------|-------------------------------|---------|---------|---------|---------|----------|------------------|
| | Over 6 | Over 10 | Over 10 | Over 30 | Over 60 | Over 100 | |
| TO 6 | TO 10 | TO 24 | TO 30 | TO 60 | TO 100 | TO 150 | ≤ |
| ±0.15 | ±0.20 | ±0.30 | ±0.30 | ±0.50 | ±0.70 | ±1.00 | |
| | | | | | | | ±2 |

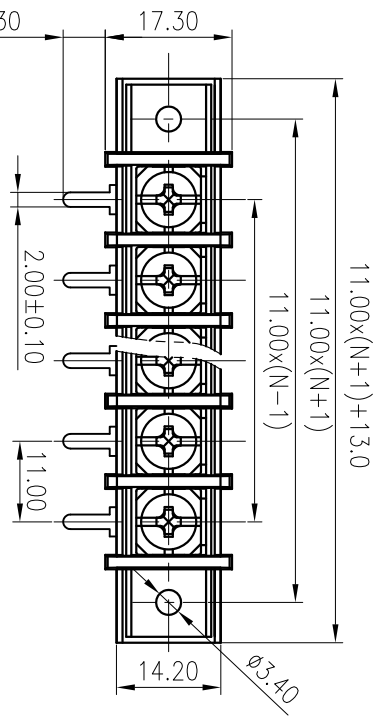

| | | | |
|--|--------------|--------------|-----------|
| 3 | Screw | Steel | Ni Plated |
| 2 | Pin header | Copper alloy | Sn Plated |
| 1 | Housing | PA66 | UL94V-0 |
| ITEM | NAME OF PART | MATERIAL | NOTES |
| UL 标准/UL Standard: B C D | | | |
| 额定电压/电流/Rated Voltage(V)/Current(A) 300/30 300/30 300/10 | | | |
| EC 标准/IEC Standard: III/3 III/2 II/2 | | | |
| 过压类别/Overvoltage Category/污染等 300/32 300/32 600/32 | | | |
| 级/ Pollution Degree 4 4 4 | | | |
| 额定电压/电流/额定电压(V)/Current(A) M4, 1.2/10.53 | | | |
| 额定脉冲电压(kV)/Rate Impulse Voltage(kV) 22~10 | | | |
| 额定扭矩/Torque Tightening(N·m/Lb·in) 11.00/N=02~20P | | | |
| 线芯范围(导线)/Wire Range(flexible)(AWG) 12 | | | |
| 间距/Pitch(mm)/线数范围/Poles -40~+105 | | | |
| 剥线长度/Stripping length(mm) Yes | | | |
| 使用温度范围/Operating temperature(°C) | | | |
| 符合RoHS环保要求/Conform to RoHS | | | |

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRAFT: WJ NK 2020.05.29

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

DEGSON®
DG65R-A-XXP-1Y-00A(H)

DRAWING NO.: DG65R-C03

TYPE: CUSTOMER DRAWING

SCALE: 1:1 SHEET 1/1

| REV | ECN | DESCRIPTION | DRAFT | DATE |
|-----|-----|-------------|-------|------|
| | | | | |