
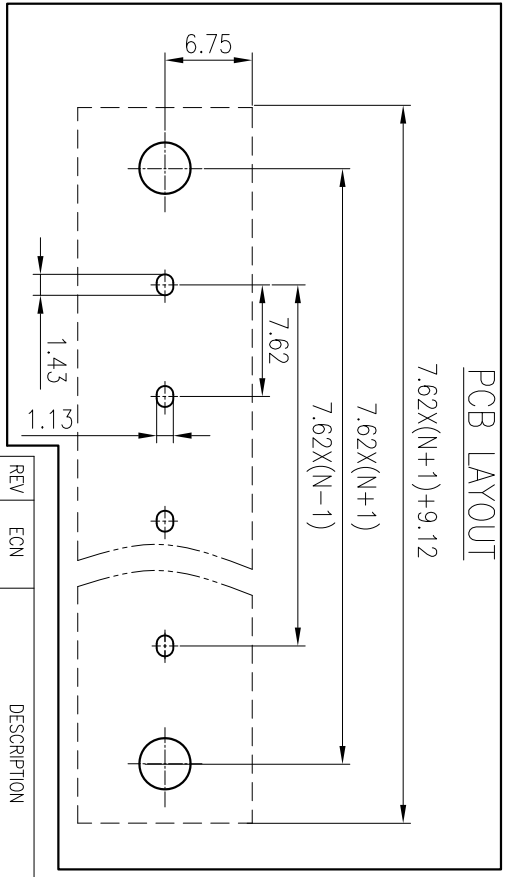


Pitch Range In mm		Nominal Dimension Range In mm					
Over	Over	Over	Over	Over	Over	Over	
6	10	10	30	60	100	150	
TO	TO	TO	TO	TO	TO	TO	
6	10	24	30	60	100	150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	
						±1.30	
						±2*	

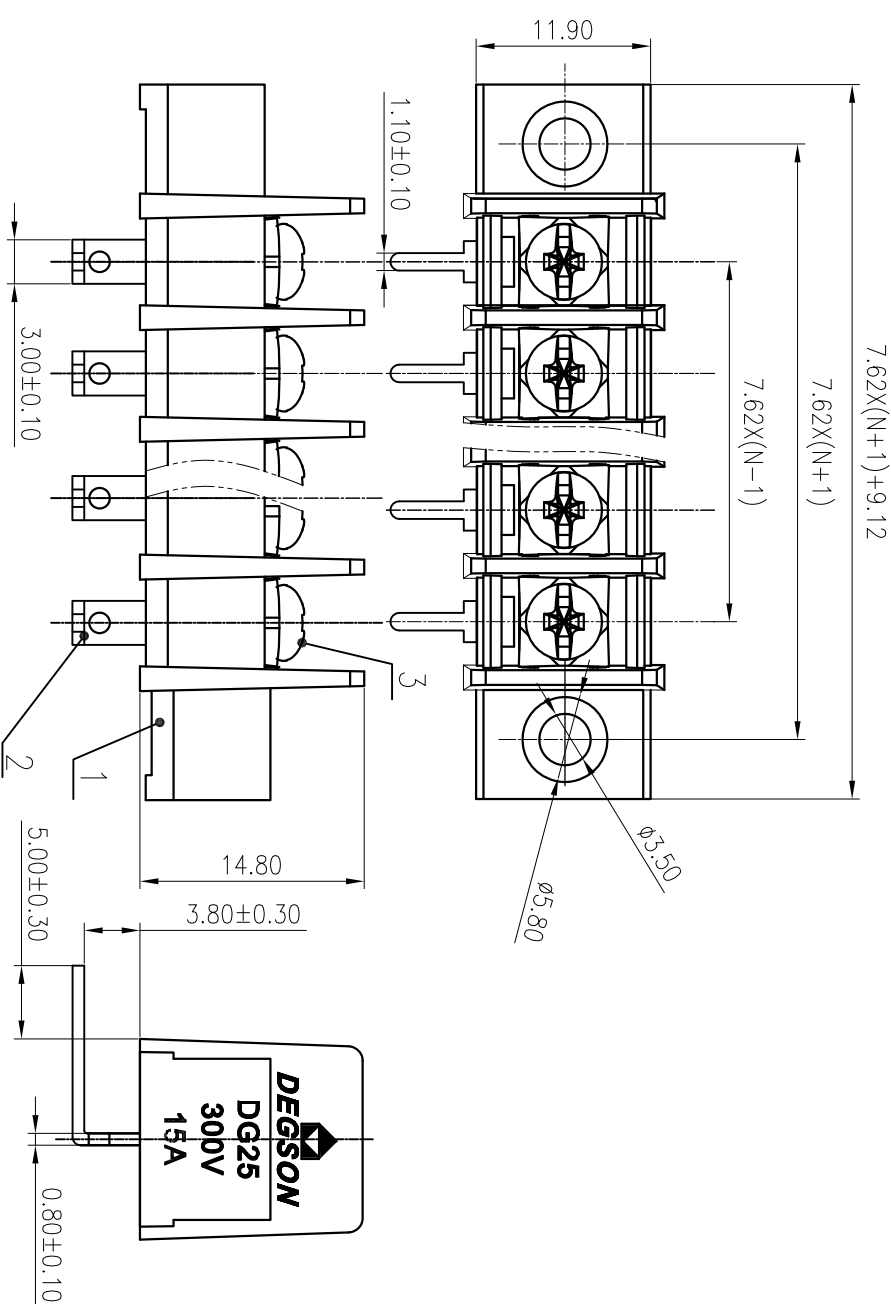

ITEM	NAME OF PART	MATERIAL	NOTES
3	SCERW	STEEL	NI PLATED
2	PIN HEADER	COPPER ALLOY	Sn PLATED
1	HOUSING	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)	300/15		300/10
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	300/24	300/24	600/24
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	5	5	5
额定扭矩/Torque Tightening(N·m/Lb·in)	M3, 0.5/4.43		
线径范围/Wire Range(AWG)	22~14AWG		
间距/Pitch(mm)/线数范围/Poles	7.62/N=02~24P		
剥线长度/Stripping Length(mm)	7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL:	/	SURFACE:	/
MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/	NAME: DG25R-A-XXP-1Y-00A(H)	
APPD:		DRAWING NO.:	DG25R-C07
CHKD:		TYPE:	CUSTOMER DRAWING
DRAFT: Zhangju	2020.05.22	SCALE:	2:1
REV	ECN	DESCRIPTION	DRAFT
1	2	3	4
1/1			