

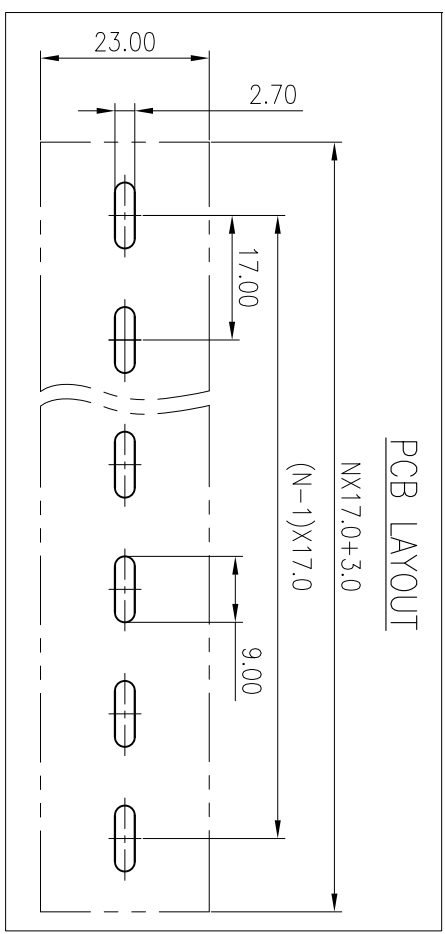
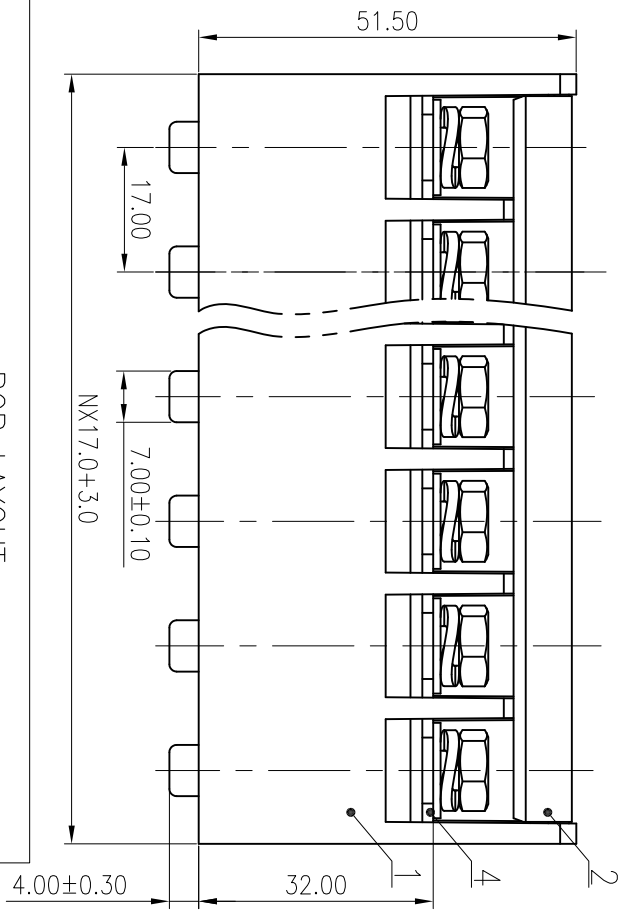


(W/O COVER)

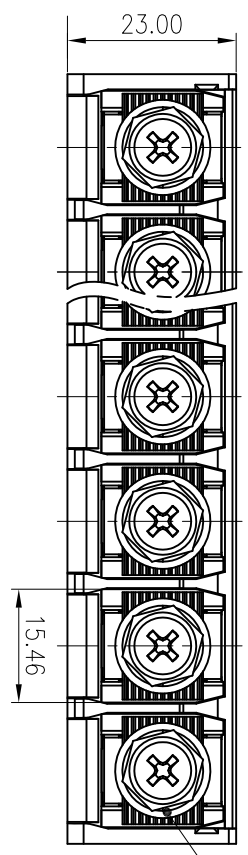

Pitch Range In mm		Nominal Dimension Range In mm		Over	
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150
TO 6	TO 10	TO 30	TO 60	TO 100	TO 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70
				±1.00	±1.30
					±2°

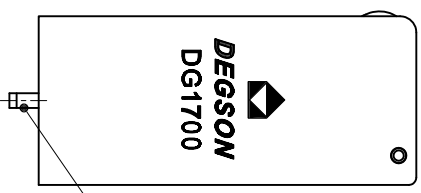

5	Pin header	Copper alloy	Sn plated
4	Nut	Steel	Ni plated
3	Screw	Steel	Zn plated
2	Cover	PC	UL94V-2
1	Housing	PBT	UL94V-0

UL 标准/UL Standard:
 额定电压/电压/Rated Voltage(V)/Current(A) 600/65/600/65/600/5
 额定扭矩/Torque Tightening(N·m/Lb.in) M6, 2.5/22.15
 线径范围/线径/Wire Range(flexible)(AWG) 22~6
 间距/Pitch(mm)/线数范围/Poles 17.00/N=03~14P
 剥线长度/Stripping length(mm) 15
 使用温度范围/Operating temperature(°C) -30~+120
 符合RoHS环保要求/Conform to RoHS Yes

SURFACE: /

MATERIAL: /

MAT NO: /

STATUS: /

APPD: /

CHKD: /

DRAFT: Nick 02/27/16"

NAME: **DEGSON** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: DG1700-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE