
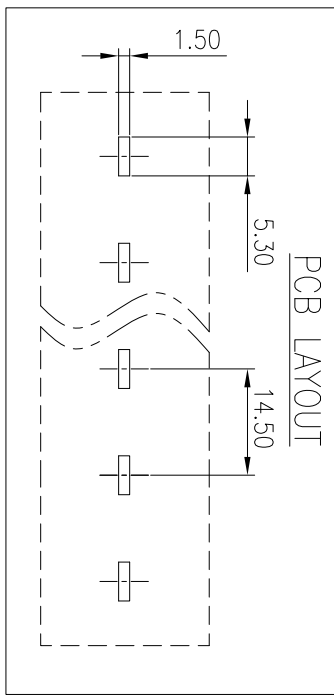
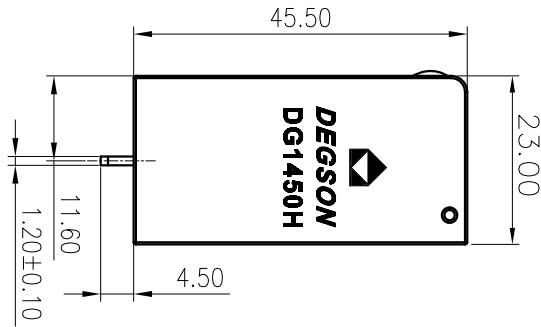
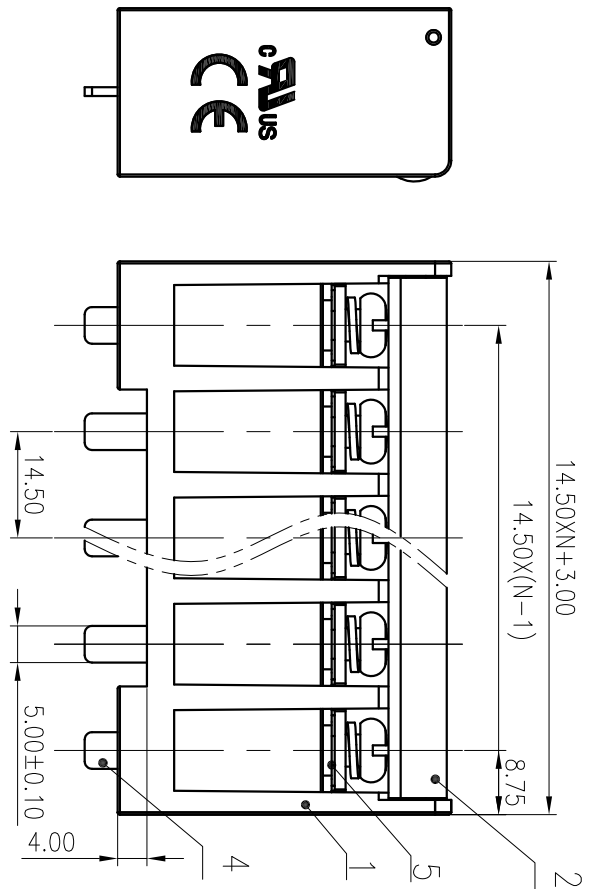


COVER OPEN VIEW

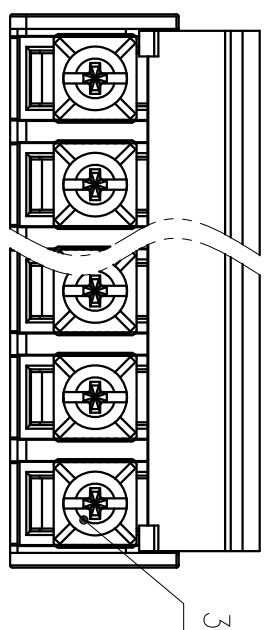

未注公差/General tolerances(mm)		0.1/10
0	>3	~
~	>6	~
3	>10	~
6	>18	~
10	>30	~
18	>50	~
30	>80	~
50	>120	~
80	>180	~
120	>250	~
180	>315	~
250	>400	~
315	>500	~
400	>630	~
500	>800	~
±0.12	±0.18	±0.22
±0.22	±0.26	±0.31
±0.31	±0.37	±0.57
±0.57	±0.80	±1.05
±1.05	±1.15	±1.60
±2.20	±2.50	±2.50

5	Nut	Steel	Zn Plated
4	Pin header	Copper alloy	Sn Plated
3	Screw	Steel	Zn Plated
2	Cover	PC	UL94V-2
1	Housing	PBT	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/45	600/45	600/5
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等	III/3	III/2	II/2
级/ Pollution Degree			
额定电压/电流/Rated Voltage(V)/Current(A)	800/76	1000/76	1000/76
螺丝扭矩/Torque Tightening(N·m/Lb·in)	M5	2.0/17.54	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	0.5~10	22~8	
间距/Pitch(mm)/线数范围/Poles	14.5	N=03~14P	
剥线长度/Stripping length(mm)	13		
使用温度范围/Operating temperature(°C)	-40~+120		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: /  
SURFACE: /

MAT NO.: /  
STATUS: /

APPD: /  
NAME: **DEGSON** 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

DRFT: Merry.tong 05/09/11"  
CHKD: /  
DRAWING NO.: DG1450H-B-C04

TYPE: CUSTOMER DRAWING  
SCALE: 1:1

REV: T0  
SHEET: 1/1

REV	ECN	DESCRIPTION	DRFT	DATE