


Pitch range in mm		Nominal dimension range in mm					
Over	Over	Over	Over	Over	Over	Over	Over
6	10	30	60	100	150	150	0.1/10
TO	TO	TO	TO	TO	TO	TO	≤
6	10	24	30	60	100	150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2°

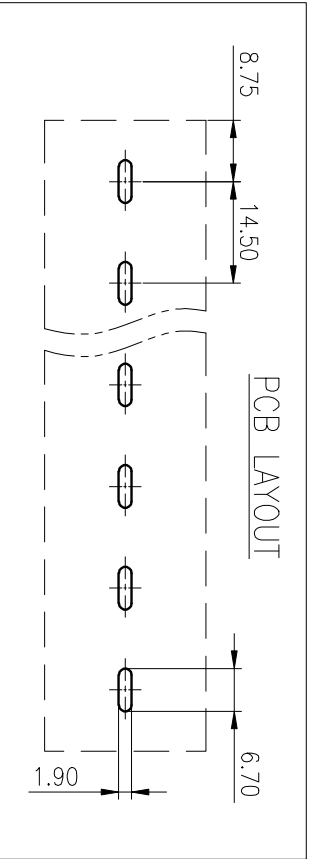

ITEM	NAME OF PART	MATERIAL	NOTES
5	Nut	Steel	Zn Plated
4	Pin header	Copper alloy	Sn Plated
3	Screw	Steel	Zn Plated
2	Cover	PC	UL94V-2
1	Housing	PBT	UL94V-0

UL Standard: B C D

额定电压/电涌/Rated Voltage(V)/Current(A) 300/50 300/50 300/710

螺栓扭矩/Torque Tightening(N·m/Lb·in) M5 2.0/17.54

线控范围(线径)/Wire Range(Flexible)(AWG) 22~8

间距/Pitch(mm)/线控范围/Poles 14.5/N=02~14P

剥线长度/Stripping length(mm) 13

使用温度范围/Operating Temperature(°C) -40~+120

符合RoHS要求/Conform to RoHS Yes

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRT: BYH 2019.01.21

DRAWING NO.: DG1450-B-C06

TYPE: CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRT	DATE

NINGBO DEGSON ELECTRICAL CO., LTD  
 宁波高松电子有限公司

NAME: DG1450-B-XXP-1Y-10A(H)

SCALE: 1:1 SHEET 1/1