

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

Technical characteristics:  
 Specifications  
 DIN EN 60 664  
 DIN EN 61 984





Inserts

01. Number of contacts : 2
02. Rated Current : 40A
03. Rated Voltage : 1000V
04. Pollution degree : 3
05. Rated impulse voltage : 8kV<sup>10</sup>
06. Insulation resistance :  $\geq 10\Omega$
07. Material : Polycarbonate
08. Limiting temperatures : -40°C ~ +125°C
09. Flammability acc. to UL94: V0
10. Mechanical working life (mating cycles) :  $\geq 500$

Contacts

01. Material: Copper alloy
02. Surface: hard-silver plated
03. Contact resistance :  $\leq 1m\Omega$
04. Terminal : Crimp terminal
05. Wire gauge : 1.5-10mm<sup>2</sup> (AWG 16-8)
06. Stripping length : 9-15mm
07. Rohs Compliance

Note: Crimp contact pins should order separately

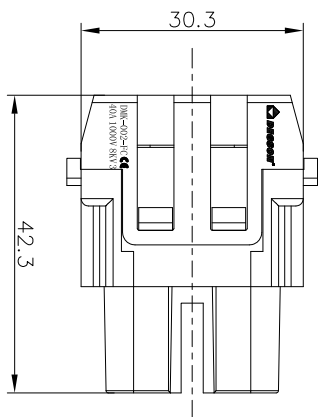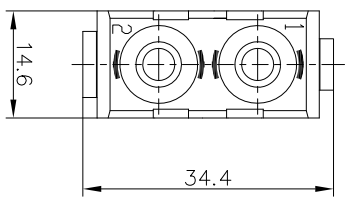

DETACHED LISTS			
PART NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
APPD:		NAME: DMK-002-FC	
CHKD:		NINGBO DEGSON ELECTRICAL CO., LTD	
DRFT:	YONG	TITLE: CUSTOMER DRAWING	REV: DO-1
	2016.08.22	DRAWING NO.:	SHEET: 1/1
		THIRD ANGLE PROJECTION	SCALE: 1:1
		DO NOT SCALE DRAWING	

A 8 7 6 5 4 3 2 1