



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

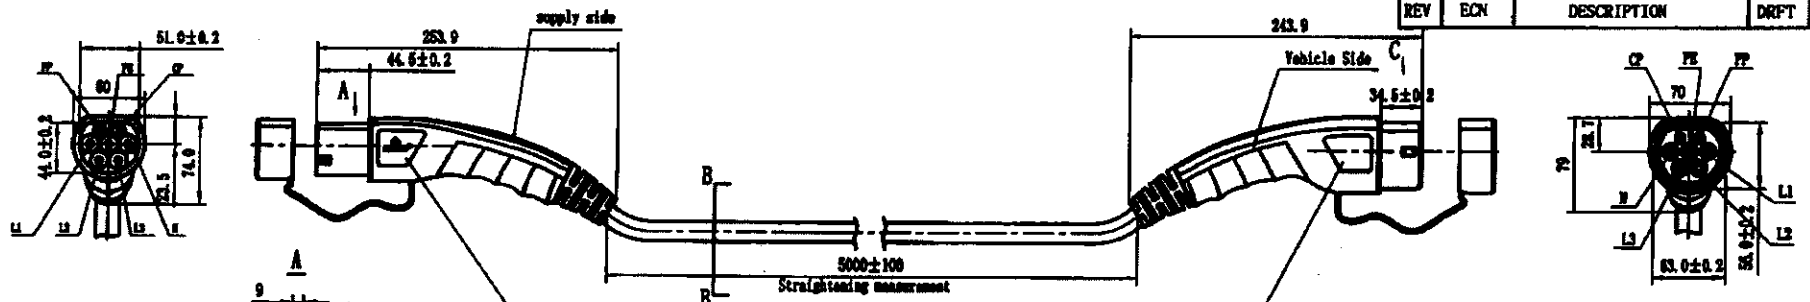

Wiring diagram
POWER SUPPLY ELECTRIC VEHICLE

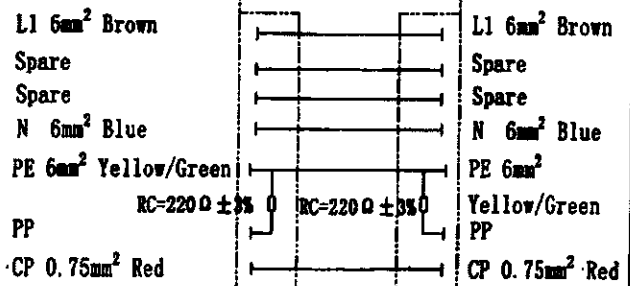


Laser Printing Front Note:
DEGSON

Laser Printing Back Note(Arial):
MEAC-S-032A-P1-03-5.0M-30AH
32A 250V AC
IEC 62196-2:2016
IP54
201xxxx-xxxx

Laser Printing Front Note(Arial):
MEAC-S-032A-V1-03-5.0M-30AH
32A 250V AC
IEC 62196-2:2016
IP54
201xxxx-xxxx

Laser Printing Back Note:
DEGSON

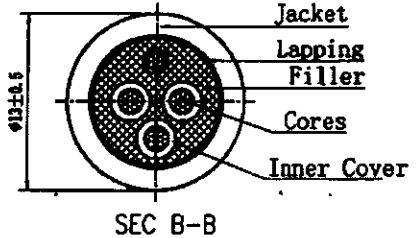

Technical parameters	
Rated voltage	250V AC
Rated current	32A
Temperature range	-30°C~+50°C
Insulate resistance	>5MΩ, 500V DC 1Min
Withstanding voltage	L, N AND PE, 2500V AC 1Min L AND N, 2500V AC 1Min
Ingress protection	IP54
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<100N
Reference standard	IEC 62196-2:2016

Customer Drawing

- NOTES:
1. Cable: EN50620-2017 3*6mm²+1*0.75mm² Black
2. RoHS Compliance

Wire Gauge Range	.XX	.X
≤6	±0.05	±0.10
6~30	±0.10	±0.20
30~120	±0.15	±0.30
120~300	±0.20	±0.50
300~1000	±0.30	±0.80
1000~2000	±0.50	±1.20
Angle Gauge Range	.XX	.X
	±0.5°	±1.0°

PART NO.://	DEGSON 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
APP: ZX 2020.1.16	NAME: EV ELECTRIC VEHICLE AND EV POWER SUPPLY (32A single-phase)		
CHK: DT 2020.1.16	MEAC-S-032A-V1P1-03-5.0M-30AH		
DRFT: BY L30 0000-01-16	TITLE: Customer Drawing	REV	DO-1
	DRAWING NO.:	SHEET	1/1
	(INCH)	SCALE	1:6

