
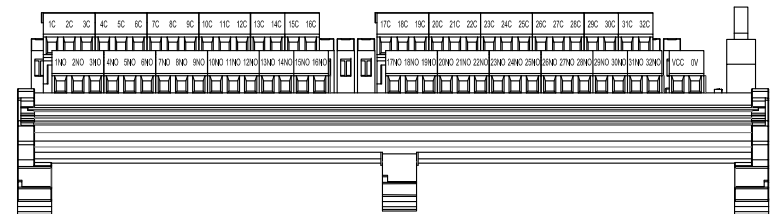
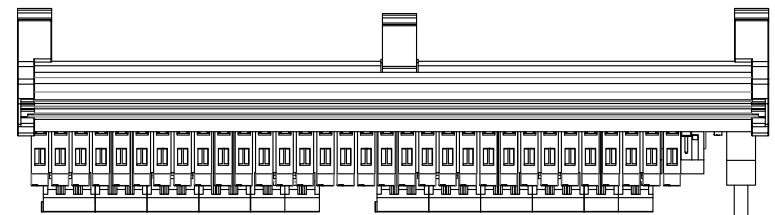
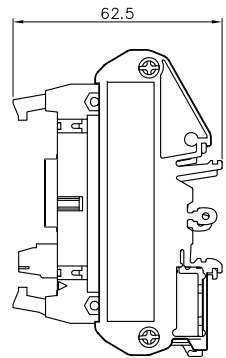


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

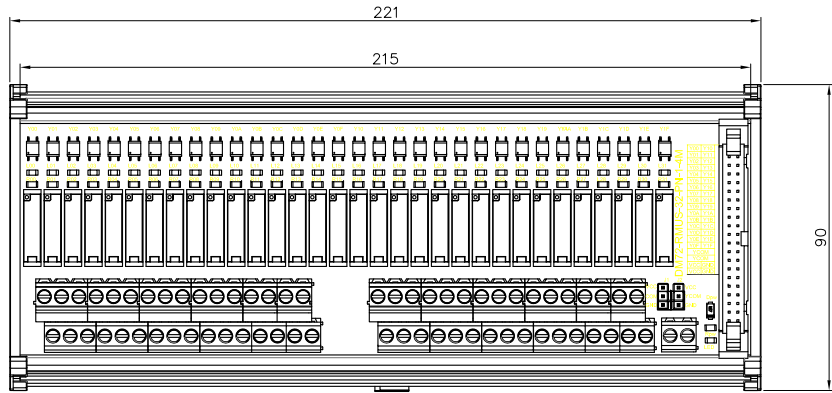

Specifications	
Rated voltage	DC24V
Rated current	7.5mA
Output Voltage	250V/AC,30V/DC;
output current	5A
contact structure	1NO
Model	32
Signal input method	PNP+NPN
Mechanical life	≥2×10 <sup>7</sup>
Electrical life	≥5×10 <sup>4</sup>
Temperature range	- 20℃ ~ +55℃
Status Indicator	YES
Connector digits	/
Stripping Length	6~7mm
Terminal torque	0.4Nm (3.54Lb-in)
Input port/wire diameter	IDC 20P/DC 40P
Output port/wire diameter	DG500-5.08/1.0-2.5mm <sup>2</sup> /24-12AWG
Installation Method	35mmDIN

PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
APPD:	NAME: DM72-RMUS-32-PN-1-4M-0XA(H)			
CHKD:				
DRFT: LZM	TITLE: ASSEMBLY DRAWING	REV		
 THIRD ANGLE PROJECTION	DRAWING NO.:	30000019	SHEET	1/1
	 DO NOT SCALE DRAWING	SCALE	1:1	