

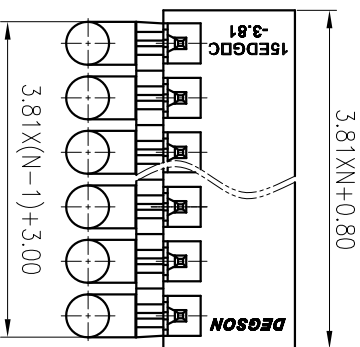
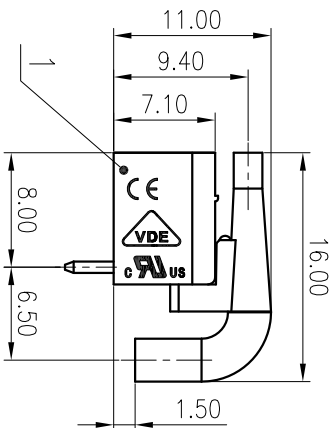


0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	~
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.50 ±2.20 ±2.50													
±Z													

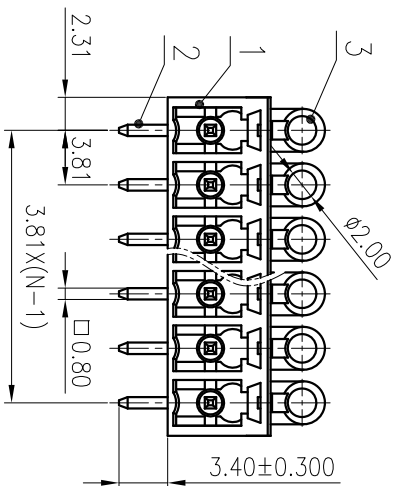

PCB LAYOUT

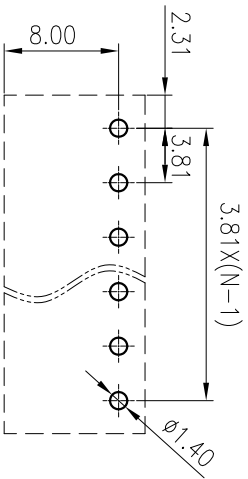

3	Housing2	PC	UL94V-0
2	Pin	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B C D			
额定电压/Rated Voltage(V)/Current(A) 300/8 / 300/8			
IEC 标准/IEC Standard: /			
过压类别/Overvoltage Category/污秽等级 II/2			
额定电压/电流/Rated Voltage(V)/Current(A) 250/7			
额定冲击电压(KV)/Rate Impulse Voltage(KV) 2.5			
间距/Pitch(mm)/线数范围/Poles 3.81/N=02~22P			
使用温度范围/Operating temperature(°C) -40~+105			
符合RoHS环保要求/Conform to RoHS Yes			

SURFACE: /

**DEGSON** 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

MATERIAL: /  
MAT NO.: /  
STATUS: /  
APPD: LonChH 2020.05.28  
CHKD: YuZhn 2020.05.28

NAME: 15EDGRC-LD-3.81-XXP-1Y-00A(H)

DRFT: CZ 2017.08.23

DRAWING NO.: 15EDGRC-LD-3.81-C01  
TYPE: CUSTOMER DRAWING  
SCALE: 2:1 SHEET 1/1

REV EON DESCRIPTION DRFT DATE

SIZE: A4 (mm) (inch)

1 2 3 4 5 6