
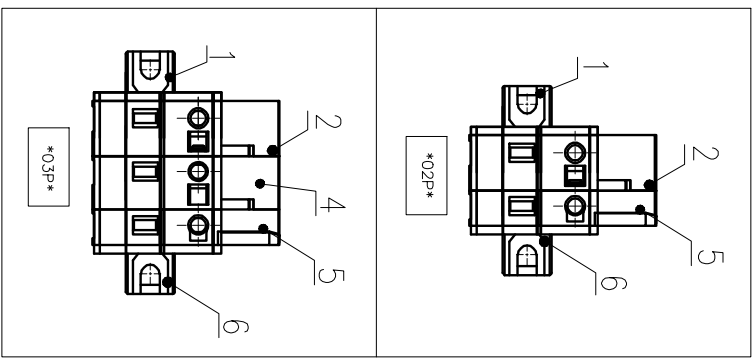
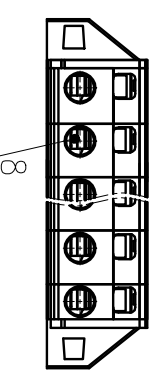
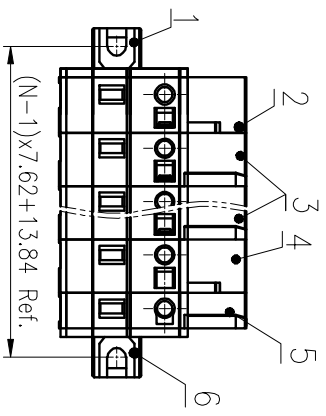

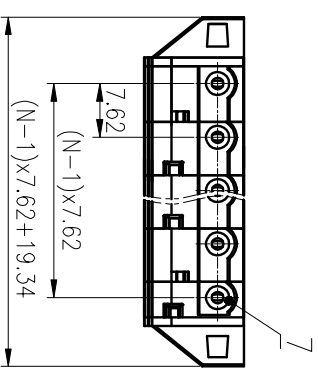


Pitch Range		In		Nominal Dimension		Range		
mm	mm	In	mm	mm	mm	mm	mm	
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150			0.1/10
TO 10	TO 24	TO 30	TO 60	TO 100	TO 150			≤
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

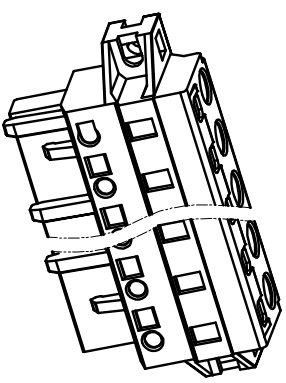

8	Clamp	Copper alloy	Sn Plated
7	Spring	Stainless Steel	
6	Cover 2	PA66	UL94V-0
5	Side Housing 2	PA66	UL94V-0
4	Middle Housing 2	PA66	UL94V-0
3	Middle Housing 1	PA66	UL94V-0
2	Side Housing 1	PA66	UL94V-0
1	Cover 1	PA66	UL94V-0

UL 标准 / UL Standard:	B	C	D
额定电压/电涌 / Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准 / IEC Standard:			
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III/3	III/2	II/2
额定电压/电涌 / Rated Voltage(V)/Current(A)	400/20	/	/
额定冲击电压 / Rate Impulse Voltage(KV)	4	/	/
线芯范围 (硬线和软线) / Wire Range(rigid and flexible)(mm ² /AWG)	0.2~2.5/22~14		
间距 / Pitch(mm) / 线芯范围 / Poles	7.62/N=02~12P		
剥线长度 / Stripping Length(mm)	9~10		
使用温度范围 / Operating Temperature(°C)	-40~+105		
符合RoHS环保要求 / Conform to RoHS	Yes		
标准颜色 / Standard color	PANTONE 7534U		

MATERIAL: /
SURFACE: /
PANTONE: 7534U

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
宁波高松电子有限公司

NAME: 8EDGKMA-7.62-XXP-11-01A(H)
DRAWING NO.: 8EDGKMA-7.62-C02

APPD:	CHKD:	DRAFT:	DATE:	SIZE:	SCALE:	REV:	SHEET:
		XieZhp	2020.06.10	A4	1:1	T0	1/1
TYPE:	CUSTOMER DRAWING						

REV	ECN	DESCRIPTION	DRAFT	DATE

A B C D

1 2 3 4 5 6