

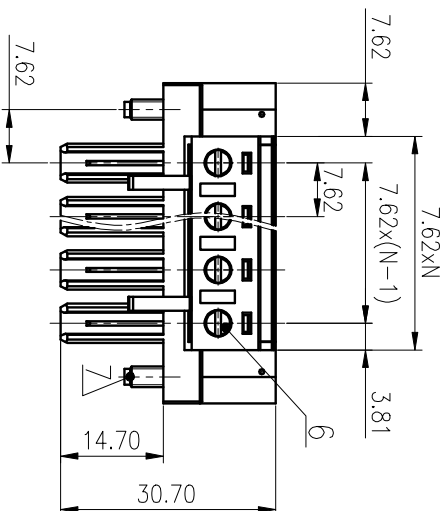




公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±Z

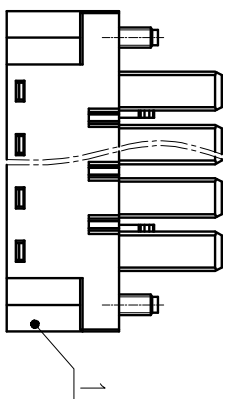

ITEM	NAME OF PART	MATERIAL	NOTES
7	Screw2	Steel	M3/Zn Plated
6	Screw1	Steel	M3/Zn Plated
5	Cage	Copper alloy	M3/Ni Plated
4	Spring	Steel	/
3	Clamp	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/301	300/350	300/710
IEC 标准/IEC Standard:	300/350/300/350/300/710		
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	/	400/32	/
额定冲击电压(kV)/Rate Impulse Voltage(kV)	/	4	/
额定扭矩/扭矩 Tightening(N·m/Lbin)	M3, 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~4.0/28~10		
间距/Pitch(mm)/线数范围/Poles	7.62/N=02~12P		
引线长度/Stripping length(mm)	10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		

MATERIAL: /

SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

NINGBO DEGSON ELECTRICAL CO., LTD
 宁波高松电子有限公司

NAME: **SEDGKM-7.62-XXP-1Y-00A(H)**

DRAFT: CenWZ 2020.06.10

DRAWING NO.: SEDGKM-7.62-C01

SIZE: A4

TYPE: CUSTOMER DRAWING

SCALE: 1:1

DESCRIPTION

DATE

SIZE: A4

SCALE: 1:1

REV T0

1

2

3

4

5

6

1/1