

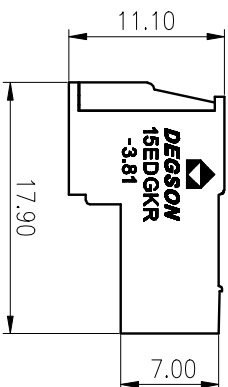
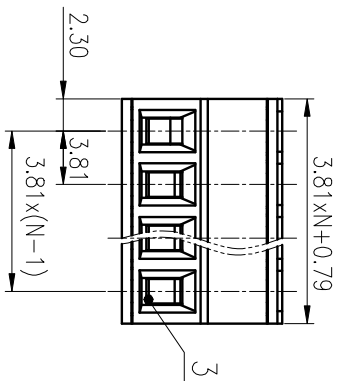



公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	
3	6	10	18	30	50	80	120	180	250	315	400	500	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	



REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1	SHEET 1/1
MATERIAL: /					SURFACE: /			
MAT NO.: /					NAME: 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
STATUS: /					APPD: LanChH 2020.05.30			
CHKD: YUZH 2020.05.30					DRAWING NO.: 10002216			
DRAFT: BotH 2020.05.30					REV T0			

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Cage	Copper Alloy	M2/Ni Plated
4	Screw	Steel	M2/Zn Plated
5	Pin	Copper	Sn Plated

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/8	/	/
IEC 标准/IEC Standard:	II/2		
过压类别/Overvoltage Category/污染等级/Pollution Degree	250/7		
额定电压/电涌/Rated Voltage(V)/Current(A)	2.5		
额定冲击电压(kV)/Rate Impulse Voltage(kV)	M2, 0.2/1.77		
拧紧扭矩/螺栓和螺线/Torque Tightening(N·m/Lbin)	1.5/28~16		
挠性/柔性/可弯曲/Range(rigid and flexible)(mm ² /AWG)	3.81/N=02~16P		
间距/Pitch(mm)/线数范围/Poles	6~7		
剥线长度/Stripping length(mm)	-40~+105		
使用温度范围/Operating temperature(°C)	Yes		
符合RoHS要求/Conform to RoHS	Yes		

D

C

B

A

D

C

B

A

1

2

3

4

5

6