


精度等级/General	tolerance(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>280	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±Z	

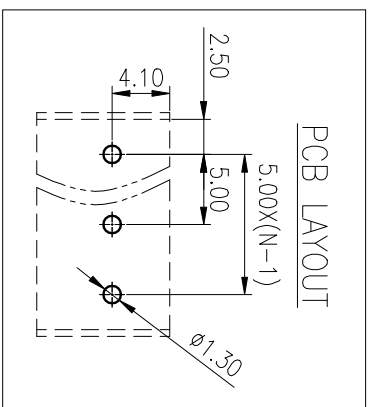

4	Pin Header	Copper Alloy	Sn Plated
3	Screw	Steel	M3/Zn Plated
2	Cage	Copper Alloy	M3/Ni Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:	B	C	D
额定电压/电源/Rated Voltage(V)/Current(A)	300/12	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级	/	III/2	/
额定电压/电源/Rated Voltage(V)/Current(A)	/	250/15	/
工频耐压/Withstanding Voltage(kV/min)	/	AC2000	/
扭矩/ Torque Tightening(N·m/Lb·in)	M3 , 02P 0.4/3.5	≥0.3P 0.5/4.43	
线径范围(裸线铜线)/Wire Range(rigid and flexible)(mm² /AWG)	0.2~1.5/26~14		
厚度/Pitch(mm)/线径范围/oles	5.00/N=02~24P		
剥线长度/Stripping length(mm)	6~7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:			
PANTONE / RAL	/		

MATERIAL: / SURFACE: /

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
宁波高松电子有限公司

NAME: DG127HH-5.0-XXP-1Y-00A(H)

APPD: LiGL 2020.06.23
STATUS: /
CHKD: Mek 2020.06.23
DRAFT: COCO 2010.12.08
DRAWING NO.: DG127HH-5.0-C01
TYPE: CUSTOMER DRAWING
SCALE: 2:1
REV T1
SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE

