
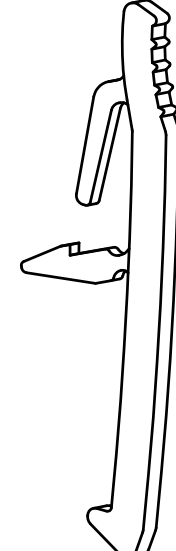
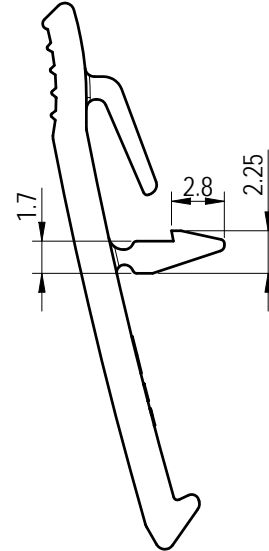

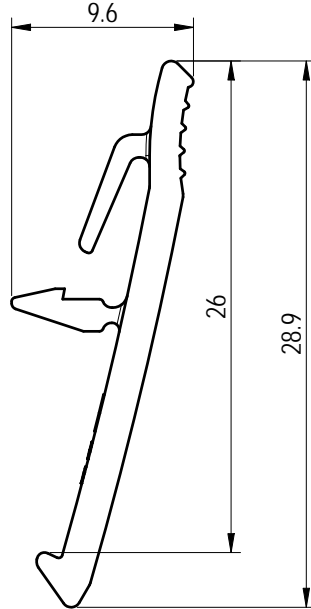



未注公差/General tolerances (mm)													0.1/10	
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500		>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in writing. All rights reserved for patent, utility model or design registrations. 除专利权明确标注外, 否则禁止转让、复制、引用、交流本文件的内容。未经书面授权, 擅自复制或传播本文件内容, 均属于侵权行为, 公司将依法追究法律责任。



线数范围/Poles	01P
阻燃等级/Flame class	UL94V-0
使用温度范围/Operating temperature(°C)	-40~+105
符合RoHS环保要求/Conform to RoHS	Yes

APPD: Peng M	2022.06.10
CHKD: Gao WG	2022.06.10
DRFT: Liu Y	2022.06.10

MATERIAL: PA66	SURFACE/COLOR: /	
MAT NO./REV: /	MAT STATUS: /	
NAME DSR1.5-01P-1Y-00A(H)		
DRAWING NO. /	TYPE CUSTOMER DRAWING	DRAWING STATUS /
SCALE 2:1	SHEET 1/1	

00	/	/	Liu Y	2022.06.10
REV	ECN	DESCRIPTION	DRFT	DATE

