
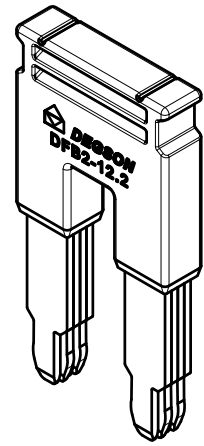
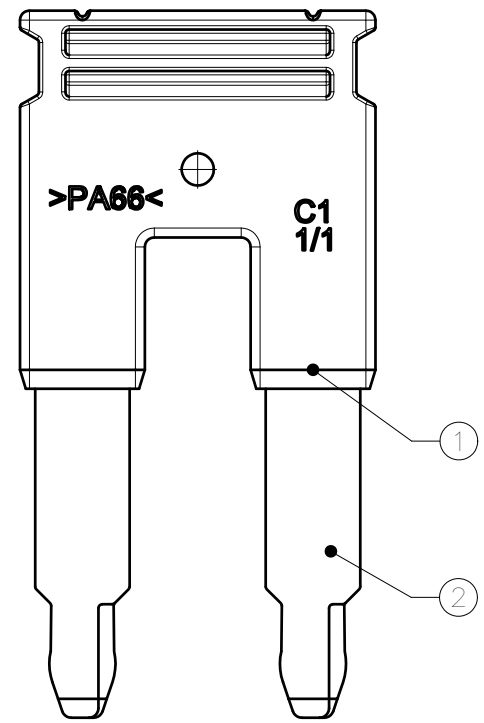

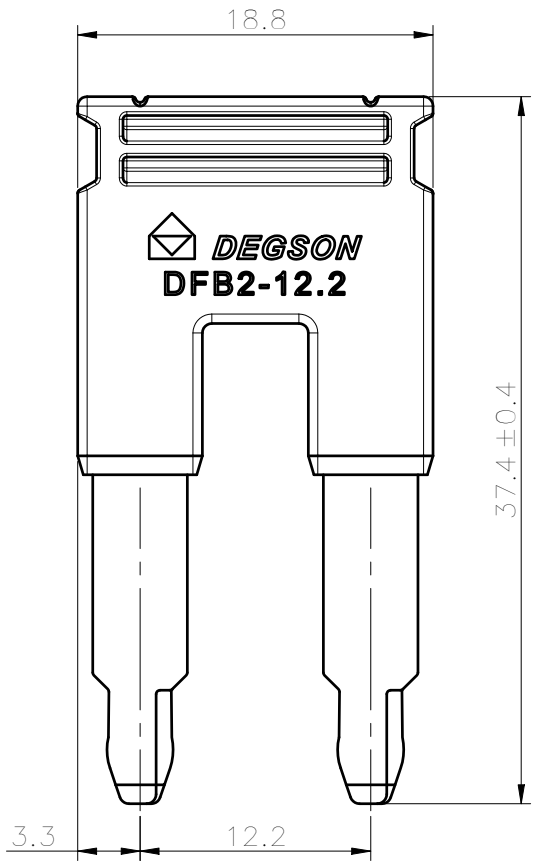


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless written authorization is received. All rights reserved for patent, utility model or design registrations. 非经书面明确授权，否则禁止转让、复制、利用、交还本文件的内容。侵犯者将负法律责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。

未注公差/General tolerances(mm)													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10 ±2'
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
间距/Pitch(mm)/线数范围/Poles											12.2/2P		
使用温度范围/Operating temperature(°C)											-40~+105		
符合 RoHS 环保要求/Conform to RoHS											Yes		



2	Current_carrier	Copper	Sn_Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

			MATERIAL: /		SURFACE: /	
			MAT. NO./REV: /		MAT STATUS: /	
APPD: Li GL	2022.03.24	NAME				
CHKD: Ma EK	2022.03.23	DFB2-12.2-1Y-00A(H)				
DRFT: Huo SR	2022.03.23					
DRAWING NO. /		TYPE CUSTOMER DRAWING		DRAWING STATUS /		SCALE 2.5:1
SHEET 1/1						

00	/	/	Huo SR	2022.03.23
REV	ECN	DESCRIPTION	DRFT	DATE

A
B
C
D