


총람

제품 장점

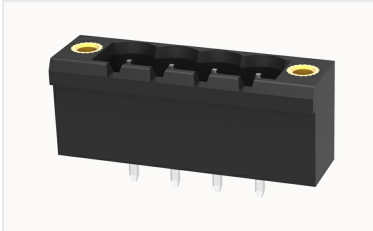

2EDGVM-THR-5.08-10030002659

Pluggable Terminal Blocks nominal current 20A. Rated voltage (III/3): 320V, pitch: 5.08mm, Color: black, Contact surface: Tin

제품 장점

- ☒ Suitable for SMT welding process
- ☒ The plug direction is perpendicular to PCB, Can meet the needs of different connectors

제품 인증



기술 데이터

제품 도면

3D

□

Processing notes

Process	Reflow soldering/wave soldering/manual soldering
---------	--

Electrical parameters UL

Rated voltage (B)	300V
Rated voltage (D)	300V
Rated current (B)	15A
Rated current (D)	10A

Electrical parameters IEC

Rated voltage	320V
Rated current	20A

Rated current(III/2)	320V
Rated surge voltage(III/2)	4KV

Item properties

Connection direction	90°
Type of installation	PCB welding
Pin arrangement	Single row in a straight line
Pitch	5.08mm
Number of potentials	4
Pluggable or not	Yes
Number of rows	1

Material data

Environmental items	Compliant with REACH/RoHS
Contact material	copper
Contact point metal surface	tin-plated
Contact zone metal surface	tin-plated
Insulation Materials	High temperature resistant materials
Insulating material group	IIIa
Flammability rating	UL94V-0

Mechanical tests

Test Specification	IEC61984/ UL1059
--------------------	------------------

Environmental data

Ambient temperature (operation)	-40℃~130℃
---------------------------------	-----------

악세사리

Tool

Screwdriver	/
Operating tool	/
Accessories	
Coding strip	/
Bridge	/
Marking strip	/
Others	/

비즈니스 데이터	
발주 번호	10030002659
포장 단위	
MOQ	
제품 무게 (포장 제외)	